






İÇİNDEKİLER / INDEX

Hakkımızda	5
<i>About Us</i>	
Yolcu Asansörleri	6-26
<i>Passenger Elevators</i>	
Ral Boya Kataloğu	27
<i>Ral Paint Catalog</i>	
Panoramik Asansörler	28-29
<i>Panoramic Elevators</i>	
Sedye Asansörü	30
<i>Hospital Elevator</i>	
Yük Asansörü	31
<i>Freight Elevator</i>	
Kaplama ve Paslanmaz Modelleri	32
<i>Coating & Stainless Steel Models</i>	
Tavan Modelleri	33
<i>Ceiling Models</i>	
Kabin Süspansiyonu ve Ağırlık Karkasları	34-35
<i>Car Frames and Counterweight Frames</i>	
Asansör Motoru	36-37
<i>Elevator Motor</i>	
Makine Şasileri	38-39
<i>Machine Chassis</i>	
Buton Modelleri	40
<i>Button Models</i>	
Asansör Ölçüleri	41
<i>Elevator Sizes</i>	
Asansör Kumanda Panoları	44-49
<i>Control Panels for Elevators</i>	
Asansör Kapıları	50-69
<i>Elevator Doors</i>	
Sertifikalar	70-72
<i>Certificates</i>	



FIREPROOF

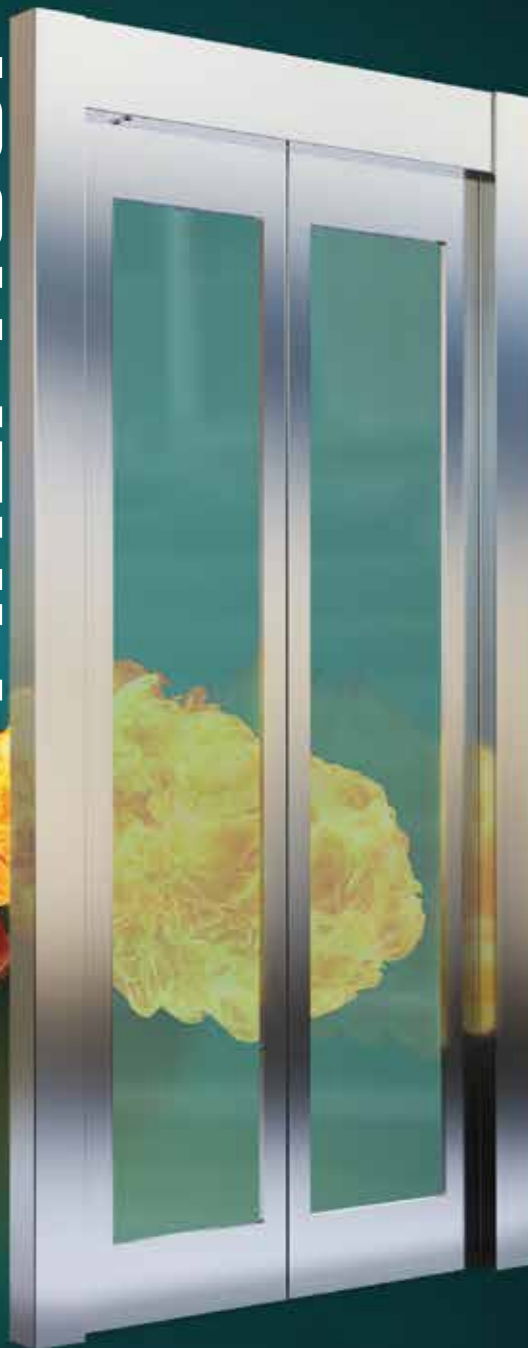



ALL IN ONE

Complete Lift Solutions

 **PROLIFT**
ELEVATOR

www.proliftasansor.com.tr





Prolift Asansör San. ve Tic. A.Ş.

2002 yılında Bahtiyar Karakoç tarafından Giresun Sanayi Sitesi'nde kurulan Prolift Asansör, 6.000 m² kapalı alana sahip tesislerinde otomatik kat ve kabin kapıları seri üretimine başlamıştır.

İhtiyaçlar doğrultusunda gerçekleştirilen yatırımlarla Bursa Sanayi Bölgesinde 16.000 m² alan üzerine kurulu yeni fabrikasını açan Prolift Asansör son teknoloji ile üretim kapasitesini maksimum seviyeye çıkartmıştır. Üretimin her aşamasında doğaya, insana, kalite ve güvene azami önem veren Prolift Asansör, yürüttüğü Ar-Ge odaklı üretim çalışmalarıyla ürün çeşitliliğini sürekli geliştirmekte ve müşteri memnuniyetini kalite politikası olarak benimsemektedir.

2 Panelden 6 Panele kadar merkezi ve teleskobik asansör kat ve kabin kapıları (boyalı paslanmaz, desenli, cam ve PVC) kendi bünyesinde tasarlayarak 95/16/EC asansör yönergesi kapsamında EN81-20-50, EN81-58 standartlarına uygun üretim yapan Prolift Asansör ürünleri, yerel ve uluslararası kurumlar tarafından kalite belgesi ile belgelendirilmiştir.

Başlangıçta yılda 10.000 kapı üretmek üzere kurulan Prolift Asansör, genişleyen pazarda Asya, Avrupa, Ortadoğu ve Afrika'ya yaptığı ihracatlarla üretim kapasitesini yılda 160.000'e çıkarmıştır.

2018 yılı itibarıyla 34 ülkeye ihracat yapan Prolift Asansör istikrarlı büyümesini sürdürerek talepler doğrultusunda ürün yelpazesine Paket Asansör sistemlerini de eklemiştir ve bu kapsamda kendi bünyesinde; asansör kabini, asansör kontrol panosu, süspansiyon, ağırlık karkası ve makine şasisi üretimlerini yapmaktadır.

2014 yılından günümüze dek Türkiye genelinde kat ve kabin kapısı üretim ve satışta sektörün lideri konumunda olan Prolift Asansör, liderliğini uluslararası düzeye taşımayı hedeflemektedir.

Prolift Asansör San. ve Tic. A.Ş.

Prolift Elevator, established in Giresun Sanayi Sitesi by Bahtiyar Karakoç in 2002, has started to produce serial production of automatic landing and car door in 6.000 m² closed area.

With the investments made in line with the needs, Prolift Elevator, which has opened its new factory in Bursa Industrial Zone on an area of 16.000 m², has increased its production capacity to the maximum level with the latest technology. Prolift Elevator, which attaches utmost importance to nature, Person, quality and trust in every stage of production, continuously develops its product variety with its R & D oriented production activities and adopts customer satisfaction as a quality policy.

2 Panels to 6 Panels central and telescopic elevator landing and car doors (painted stainless, decorative, glass and PVC) in its own structure by designing the 95/16 / EC elevator directive EN81-20-50, EN81-58 Prolift Elevator products that meet the standards of production has been certified by local and international institutions.

Prolift Elevator, which was established to produce 10.000 doors a year, has increased its production capacity to 160.000 per year with exports to Asia, Europe, Middle East and Africa in the expanding market.

By year 2018, Prolift Elevator, which exports to 34 countries, added Package Lift systems to its product range in line with the demands and within this scope ; elevator cabin, elevator control board, suspension, weight carcass and machine chassis production by continuing its steady growth.

Prolift Elevator, which is the leader of the sector in production and sales of landing and car doors from 2014 to today, targets to take its leadership to the international level.

AKHAL TEKE-SB



KAPLAMA Satine Paslanmaz

Coating Stainless Steel

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling Stainless Steel Laser Cut

TABAN Doğal Granit

Floor Natural Granite

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel


KÜPEŞTE Çift Küpeşte Çift Sıra Paslanmaz

Handrail Double Handrail Double Row Stainless Steel

AYNA Tam Boy

Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



KAPLAMA	Dekoratif Kabartma Paslanmaz
<i>Coating</i>	<i>Decorative Embossing Stainless Steel</i>
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	<i>Stainless Steel Laser Cut</i>
TABAN	Doğal Granit
<i>Floor</i>	<i>Natural Granite</i>
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	<i>Stainless Steel</i>
KÜPEŞTE	Çift Küpeşte Paslanmaz
<i>Railing</i>	<i>Double Handrail Stainless Steel</i>
AYNA	Tam Boy
<i>Mirror</i>	<i>Full Size</i>

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



AKHAL TEKE-BD



AKHAL TEKE-KD

KAPLAMA	Dekoratif Kabartma Paslanmaz
<i>Coating</i>	<i>Decorative Embossing Stainless Steel</i>
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	<i>Stainless Steel Laser Cut</i>
TABAN	Doğal Granit
<i>Floor</i>	<i>Natural Granite</i>
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	<i>Stainless Steel</i>
KÜPEŞTE	Çift Küpeşte Paslanmaz
<i>Railing</i>	<i>Double Handrail Stainless Steel</i>
AYNA	Tam Boy
<i>Mirror</i>	<i>Full Size</i>

Taban/Floor



Kaplama/Coating



Tavan/Ceiling




KAPLAMA	Dekoratif Kabartma Paslanmaz
<i>Coating</i>	<i>Decorative Embossing Stainless Steel</i>
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	<i>Stainless Steel Laser Cut</i>
TABAN	Granit
<i>Floor</i>	<i>Granite</i>
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	<i>Stainless Steel</i>
KÜPEŞTE	Çift Küpeşte Paslanmaz
<i>Railing</i>	<i>Double Handrail Stainless Steel</i>
AYNA	Tam Boy
<i>Mirror</i>	<i>Full Size</i>


Taban/Floor



Kaplama/Coating



Tavan/Ceiling



AKHAL TEKE-ND



AKHAL TEKE-DD



KAPLAMA	Dekoratif Kabartma Paslanmaz
<i>Coating</i>	<i>Decorative Embossing Stainless Steel</i>
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	<i>Stainless Steel Laser Cut</i>
TABAN	Doğal Granit
<i>Floor</i>	<i>Natural Granite</i>
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	<i>Stainless Steel</i>
KÜPEŞTE	Çift Küpeşte Paslanmaz
<i>Railing</i>	<i>Double Handrail Stainless Steel</i>
AYNA	Tam Boy
<i>Mirror</i>	<i>Full Size</i>

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



SEKLAVI-SD

KAPLAMA	Dekoratif Paslanmaz
<i>Coating</i>	<i>Decorative Stainless Steel</i>
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	<i>Stainless Steel Laser Cut</i>
TABAN	Granit
<i>Floor</i>	<i>Granite</i>
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	<i>Stainless Steel</i>
KÜPEŞTE	Çift Küpeşte Paslanmaz
<i>Railing</i>	<i>Double Handrail Stainless Steel</i>
AYNA	Tam Boy
<i>Mirror</i>	<i>Full Size</i>

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



SEKLAVI-AKD



KAPLAMA Dekoratif Altın Paslanmaz
Coating Decorative Gold Stainless Steel

TAVAN Altın Satine Paslanmaz
Lazer Kesim
Ceiling Gold Stainless Steel Laser Cut

TABAN Doğal Granit
Floor Natural Granite

AKSESUAR Altın Satine Paslanmaz
Accessory Gold Stainless Steel

KÜPEŞTE Çift Küpeşte Altın Paslanmaz
Railing Double Handrail Stainless Steel

AYNA Tam Boy
Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling




SEKLAVI-OD

KAPLAMA	Dekoratif Paslanmaz
<i>Coating</i>	<i>Decorative Stainless Steel</i>
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	<i>Stainless Steel Laser Cut</i>
TABAN	Doğal Granit
<i>Floor</i>	<i>Natural Granite</i>
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	<i>Stainless Steel</i>
KÜPEŞTE	Çift Küpeşte Paslanmaz
<i>Railing</i>	<i>Double Handrail Stainless Steel</i>
AYNA	Tam Boy
<i>Mirror</i>	<i>Full Size</i>



Taban/Floor



Kaplama/Coating



Tavan/Ceiling

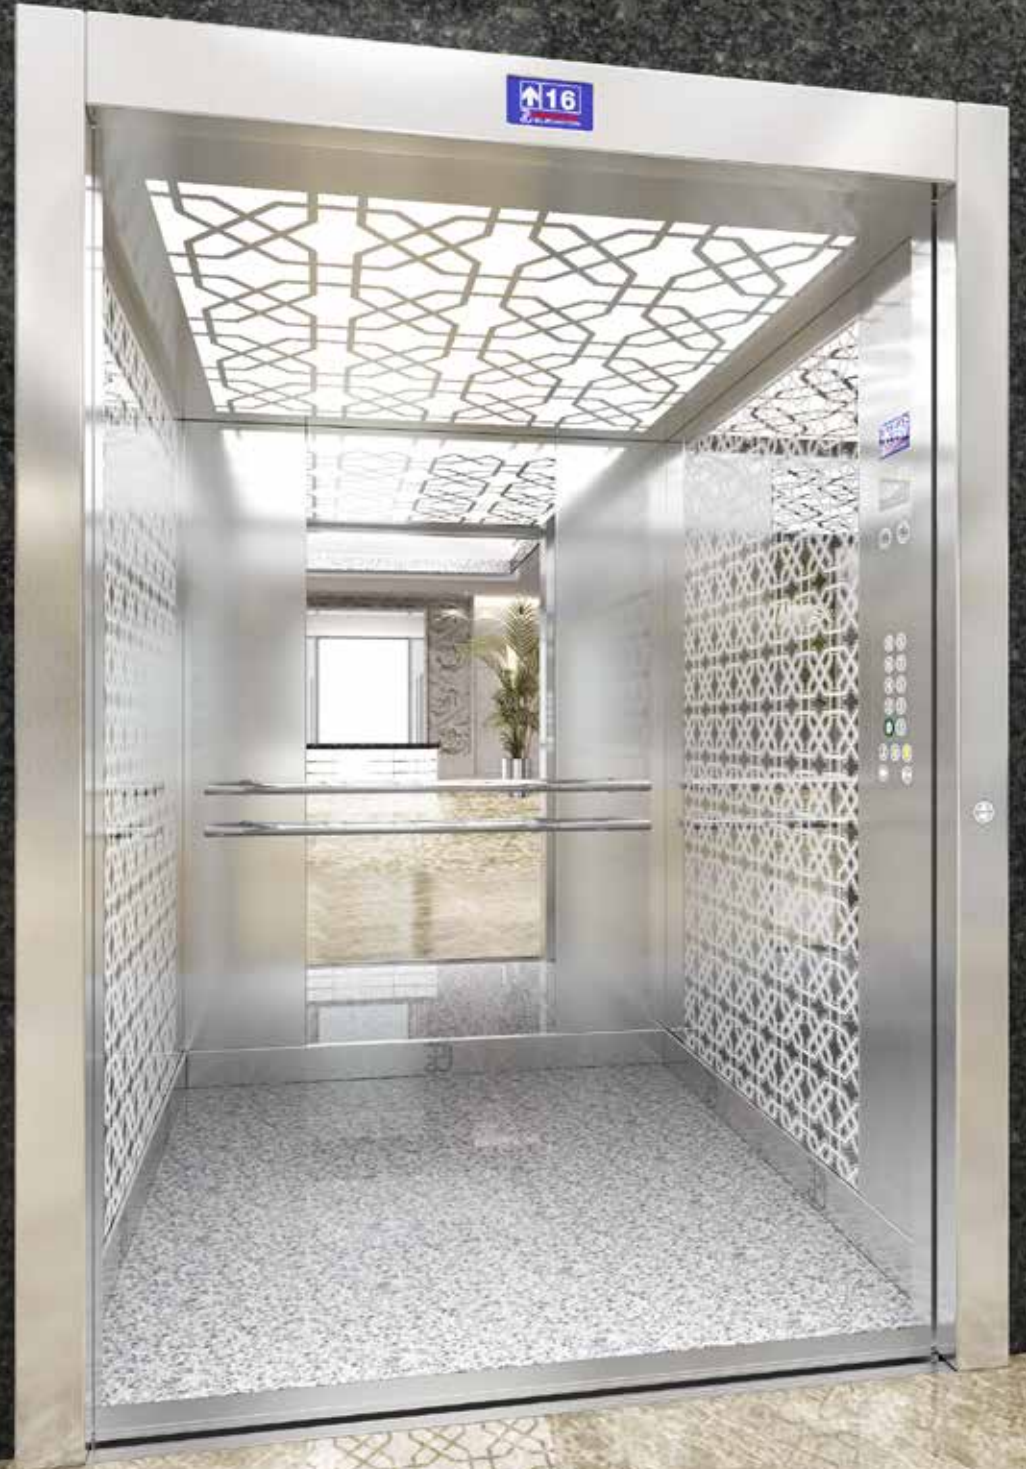

SEKLAVI-3BD



KAPLAMA Dekoratif Paslanmaz
Coating Decorative Stainless Steel

TAVAN Satine Paslanmaz Lazer Kesim
Ceiling Stainless Steel Laser Cut

TABAN Granit
Floor Granite

AKSESUAR Satine Paslanmaz
Accessory Stainless Steel

KÜPEŞTE Çift Küpeşte Paslanmaz
Railing Double Handrail Stainless Steel

AYNA Tam Boy
Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



SEKLAVI-AUD

KAPLAMA Dekoratif Altın Paslanmaz

Coating Decorative Gold Stainless Steel

TAVAN Ayna Altın Paslanmaz
Lazer Kesim

Ceiling Mirror Gold Stainless Steel
Laser Cut

TABAN Granit
Floor Granite

AKSESUAR Ayna Altın Paslanmaz
Accessory Mirror Gold Stainless Steel

KÜPEŞTE Çift Küpeşte Altın
Paslanmaz

Railing Double Handrail Gold
Stainless Steel

AYNA Tam Boy
Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



MORGAN-1B



KAPLAMA Laminat Kaplama

Coating *Laminate Coating*

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling *Stainless Steel Laser Cut*

TABAN PVC Kaplama

Floor *PVC Coating*

AKSESUAR Satine Paslanmaz

Accessory *Stainless Steel*


KÜPEŞTE Çift Küpeşte Paslanmaz

Railing *Double Handrail Stainless Steel*

AYNA Tam Boy

Mirror *Full Size*

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



KAPLAMA Laminat Kaplama

Coating *Laminate Coating*

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling *Stainless Steel Laser Cut*

TABAN PVC Kaplama

Floor *PVC Coating*

AKSESUAR Satine Paslanmaz

Accessory *Stainless Steel*

KÜPEŞTE Çift Küpeşte Paslanmaz

Railing *Double Handrail Stainless*

AYNA Tam Boy

Mirror *Full Size*

MORGAN-YZ

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



MORGAN-SB



KAPLAMA Laminat Kaplama

Coating Laminate Coating

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling Stainless Steel Laser Cut

TABAN PVC Kaplama

Floor PVC Coating

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel

KÜPEŞTE Çift Küpeşte Paslanmaz

Railing Double Handrail Stainless Steel

AYNA Tam Boy

Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



MORGAN-KS

KAPLAMA Laminat Kaplama

Coating Laminate Coating

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling Stainless Steel Laser Cut

TABAN PVC Kaplama

Floor PVC Coating

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel


KÜPEŞTE Çift Küpeşte Paslanmaz

Railing Double Handrail Stainless Steel

AYNA Tam Boy

Mirror Full Size


Taban/Floor



Kaplama/Coating



Tavan/Ceiling

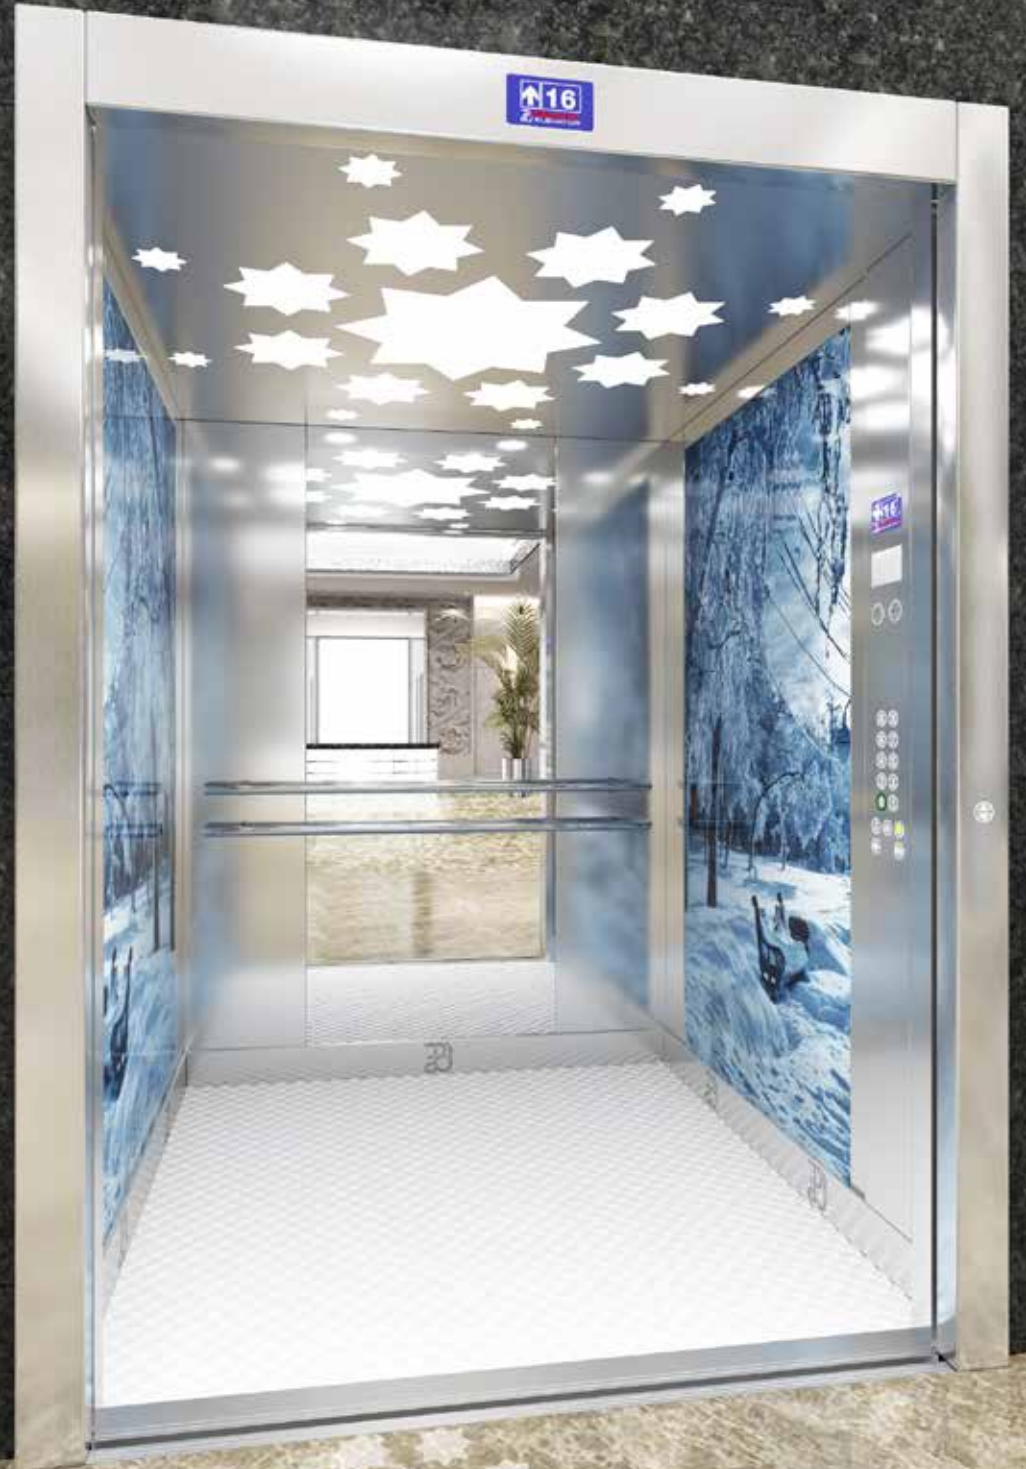

MORGAN-YD



KAPLAMA Laminat Kaplama

Coating Laminate Coating

TAVAN Altın Satine Paslanmaz
Lazer Kesim

Ceiling Golden Stainless Steel Laser
Cut

TABAN PVC Kaplama

Floor PVC Coating

AKSESUAR Altın Satine Paslanmaz

Accessory Gold Stainless Steel

KÜPEŞTE Çift Küpeşte Altın
Paslanmaz

Railing Double Handrail Gold
Stainless Steel

AYNA Tam Boy

Mirror Full Size


Taban/Floor



Kaplama/Coating



Tavan/Ceiling



YILKI-SAD

KAPLAMA PVC

Coating PVC

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling Stainless Steel Laser Cut

TABAN Doğal Granit

Floor Natural Granite

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel

KÜPEŞTE Çift Küpeşte Çift Sıra Paslanmaz

Railing Double Handrail Double Row Stainless Steel

AYNA Tam Boy

Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



YILKI-KAD



KAPLAMA <i>Coating</i>	PVC PVC
TAVAN <i>Ceiling</i>	Satine Paslanmaz Lazer Kesim Stainless Steel Laser Cut
TABAN <i>Floor</i>	PVC Kaplama PVC Coating
AKSESUAR <i>Accessory</i>	Satine Paslanmaz Stainless Steel
KÜPEŞTE <i>Railing</i>	Çift Küpeşte Paslanmaz Double Handrail Stainless Steel
AYNA <i>Mirror</i>	Tam Boy Full Size


Taban/Floor



Kaplama/Coating



Tavan/Ceiling



YILKI-MCD

KAPLAMA PVC

Coating PVC

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling Stainless Steel Laser Cut

TABAN PVC Kaplama

Floor PVC Coating

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel

KÜPEŞTE Çift Küpeşte Paslanmaz

Railing Double Handrail Stainless Steel

AYNA Tam Boy

Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



YILKI-BD



KAPLAMA	PVC
<i>Coating</i>	<i>PVC</i>
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	<i>Stainless Steel Laser Cut</i>
TABAN	PVC Kaplama
<i>Floor</i>	<i>PVC Coating</i>
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	<i>Stainless Steel</i>
KÜPEŞTE	Çift Küpeşte Paslanmaz
<i>Railing</i>	<i>Double Handrail Stainless Steel</i>
AYNA	Tam Boy
<i>Mirror</i>	<i>Full Size</i>

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



YILKI-AD

KAPLAMA PVC

Coating PVC

TAVAN Satine Paslanmaz Lazer Kesim

Ceiling Stainless Steel Laser Cut

TABAN PVC Kaplama

Floor PVC Coating

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel


KÜPEŞTE Çift Küpeşte Paslanmaz

Railing Double Handrail Stainless Steel

AYNA Tam Boy

Mirror Full Size


Taban/Floor



Kaplama/Coating



Tavan/Ceiling

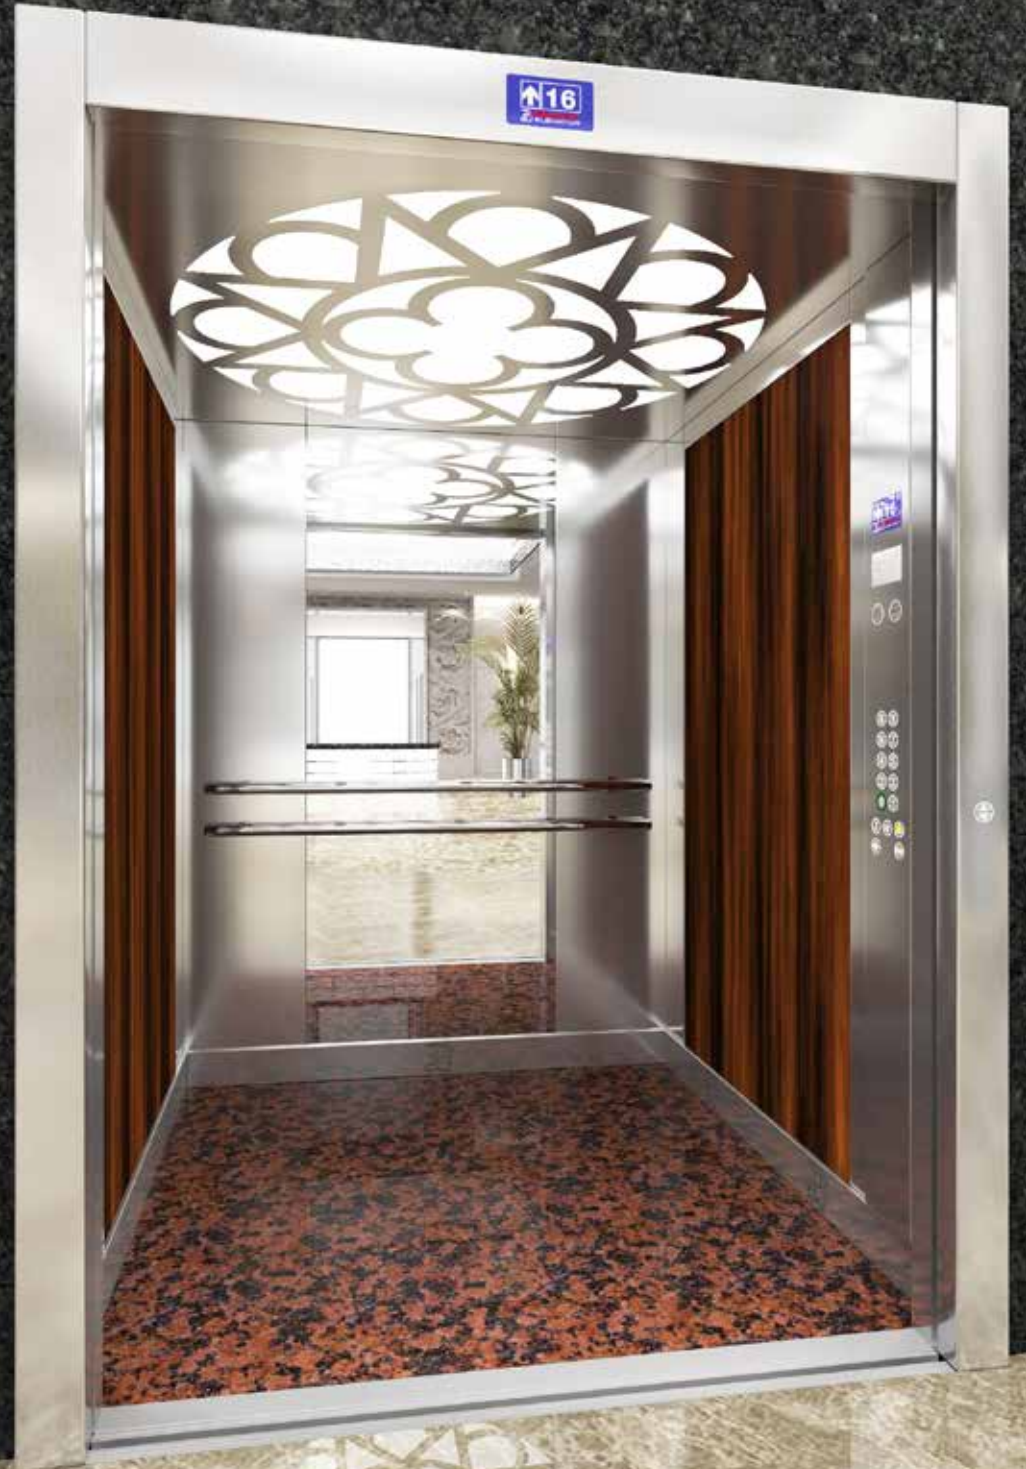

NOVA



KAPLAMA Elektrostatik Boya

Coating Electrostatic Paint

TAVAN Elektrostatik Boyalı Lazer Kesim

Ceiling Electrostatic Paint Laser Cut

TABAN PVC Kaplama

Floor PVC Coating

AKSESUAR Elektrostatik Boyalı

Accessory Electrostatic Paint

KÜPEŞTE Çift Küpeşte Paslanmaz

Railing Double Handrail Stainless Steel

AYNA Tam Boy

Mirror Full Size

Taban/Floor




Kaplama/Coating



Tavan/Ceiling



RAL BOYA KATALOĞU / *RAL PAINT CATALOG*




RAL 7032



RAL 7033



RAL 7034



RAL 7035



RAL 8001



RAL 8002



RAL 8003



RAL 8004




RAL 7008



RAL 7011



RAL 7013



RAL 7021

QUARTER-OV

KAPLAMA	Panoramik Lamine Cam 8mm
<i>Coating</i>	Panoramic Laminated Glass 8mm
TAVAN	Satine Paslanmaz Lazer Kesim
<i>Ceiling</i>	Stainless Steel Laser Cut
TABAN	Doğal Granit
<i>Floor</i>	Natural Granite
AKSESUAR	Satine Paslanmaz
<i>Accessory</i>	Stainless Steel
KÜPEŞTE	İkili Özel Paslanmaz Küpeşte
<i>Railing</i>	Double Special Handrail Stainless Steel

Taban/Floor



Tavan/Ceiling



QUARTER-KR

KAPLAMA Panoramik Lamine Cam
8mm

Coating Panoramic Laminated Glass
8mm

TAVAN Satine Paslanmaz Lazer
Kesim

Ceiling Stainless Steel Laser Cut

TABAN Doğal Granit

Floor Natural Granite

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel

KÜPEŞTE Bükümlü Özel Küpeşte

Railing Twisted Special Handrail

Taban/Floor



Tavan/Ceiling



MARVARI-SB



KAPLAMA Dikey Satine Paslanmaz

Coating Vertical Stainless Steel

TAVAN Lazer Kesim

Ceiling Laser Cut

TABAN Desenli Sac

Floor Decorative Sheet

AKSESUAR Satine Paslanmaz

Accessory Stainless Steel

KÜPEŞTE Çift Sıra Ayna Paslanmaz

Railing Double Row Handrail Mirror
Stainless Steel


AYNA Tam Boy

Mirror Full Size

Taban/Floor



Kaplama/Coating



Tavan/Ceiling



SHIRE-RB

KAPLAMA Elektrostatik Boya

Coating Electrostatic Paint

TAVAN Lazer Kesim

Ceiling Laser Cut

TABAN Desenli Sac

Floor Decorative Sheet


AKSESUAR Çift Sıra Koruma
Çıtası
Tahliye Kapağı ve
Merdiven

Accessory Double Row
Protection Fence
Evacuation Lid and
Stairs


Taban/Floor




Kaplama/Coating

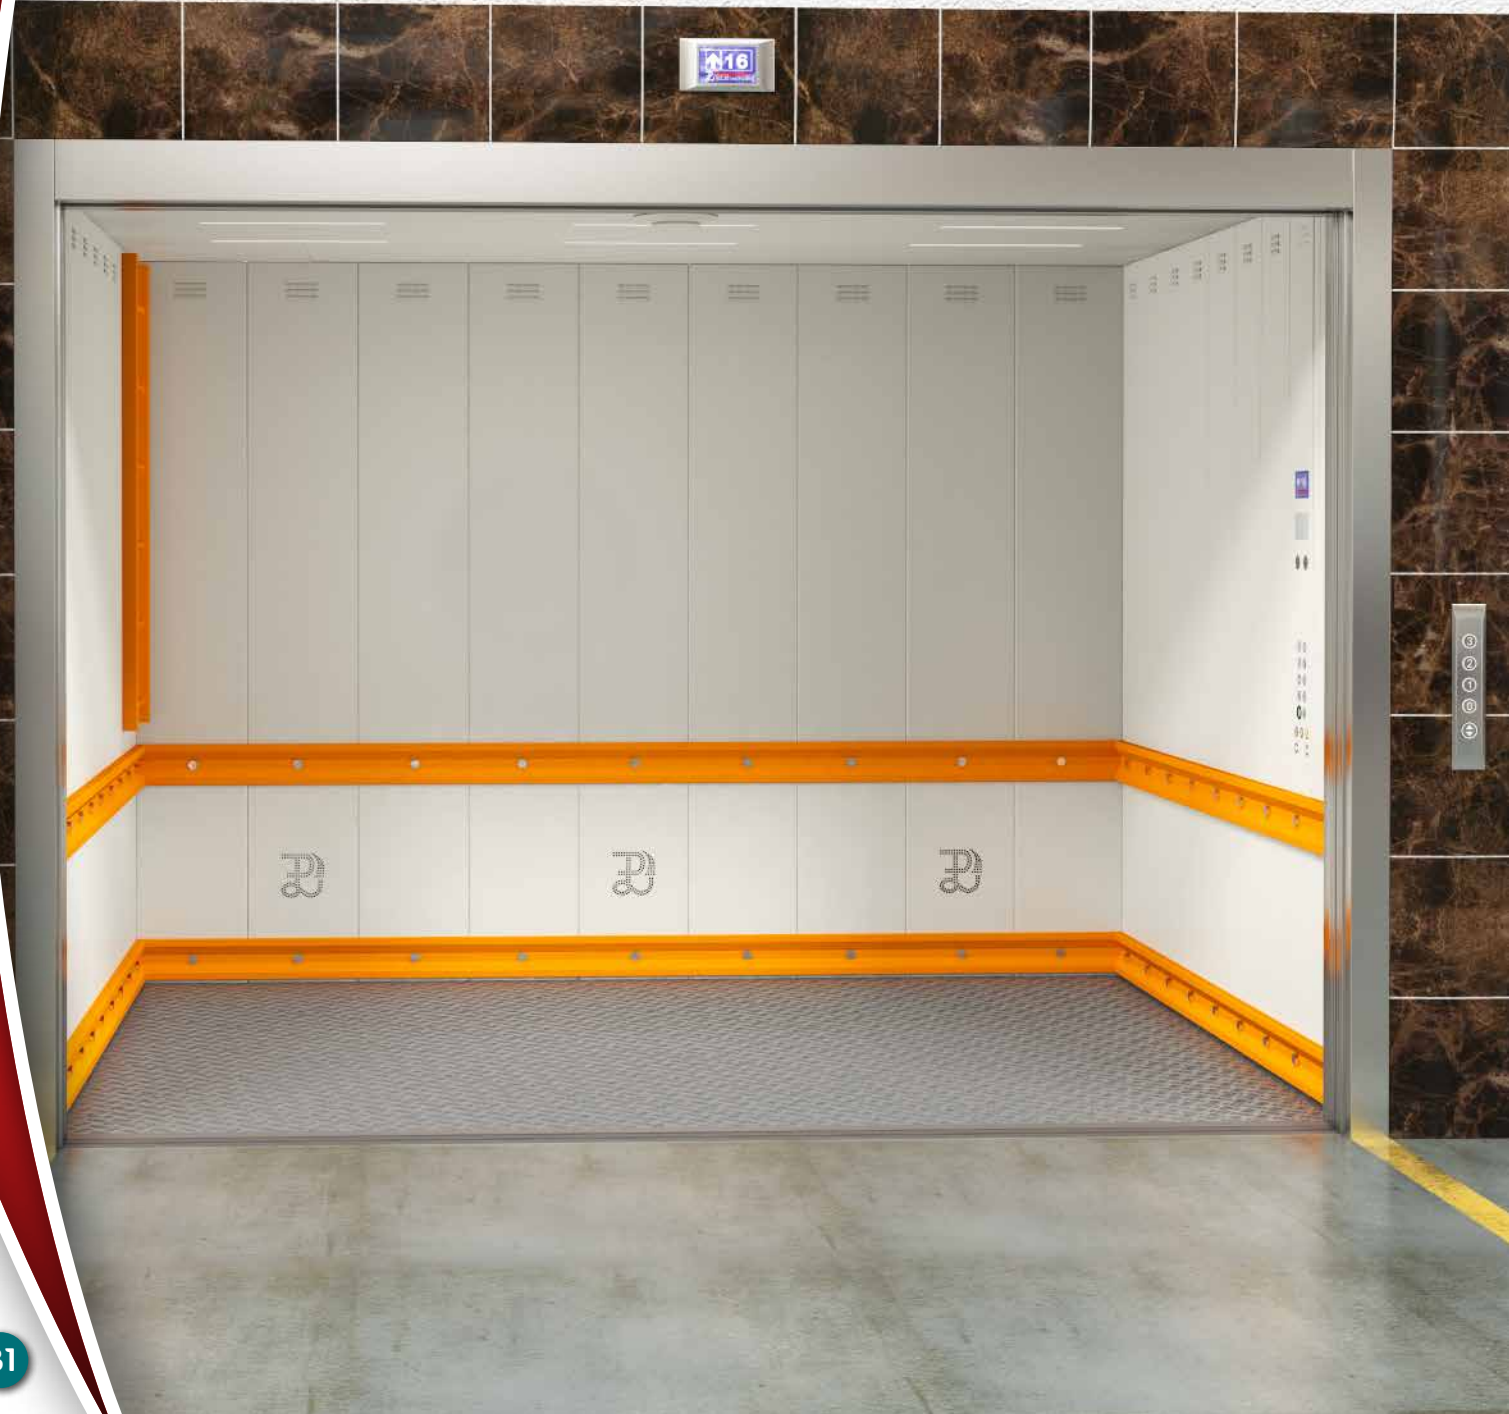

Taban Kaplama / Floor Coating

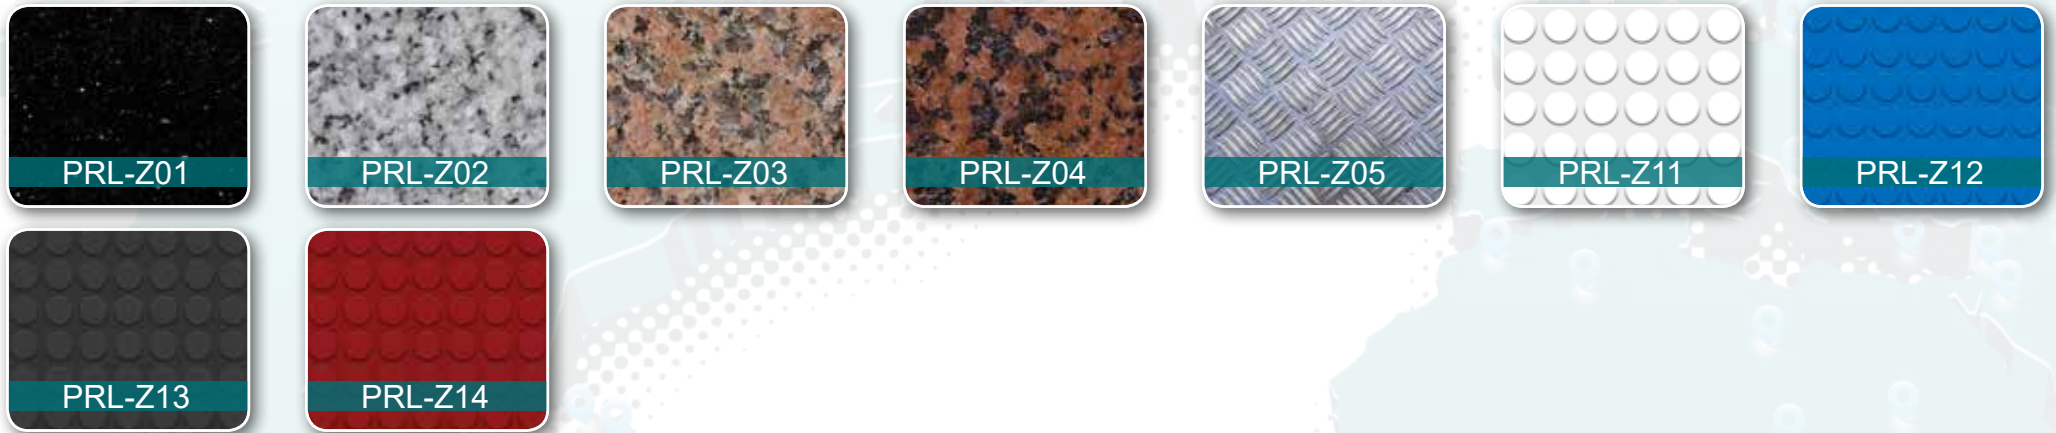

Panel Kaplama / Panel Coating

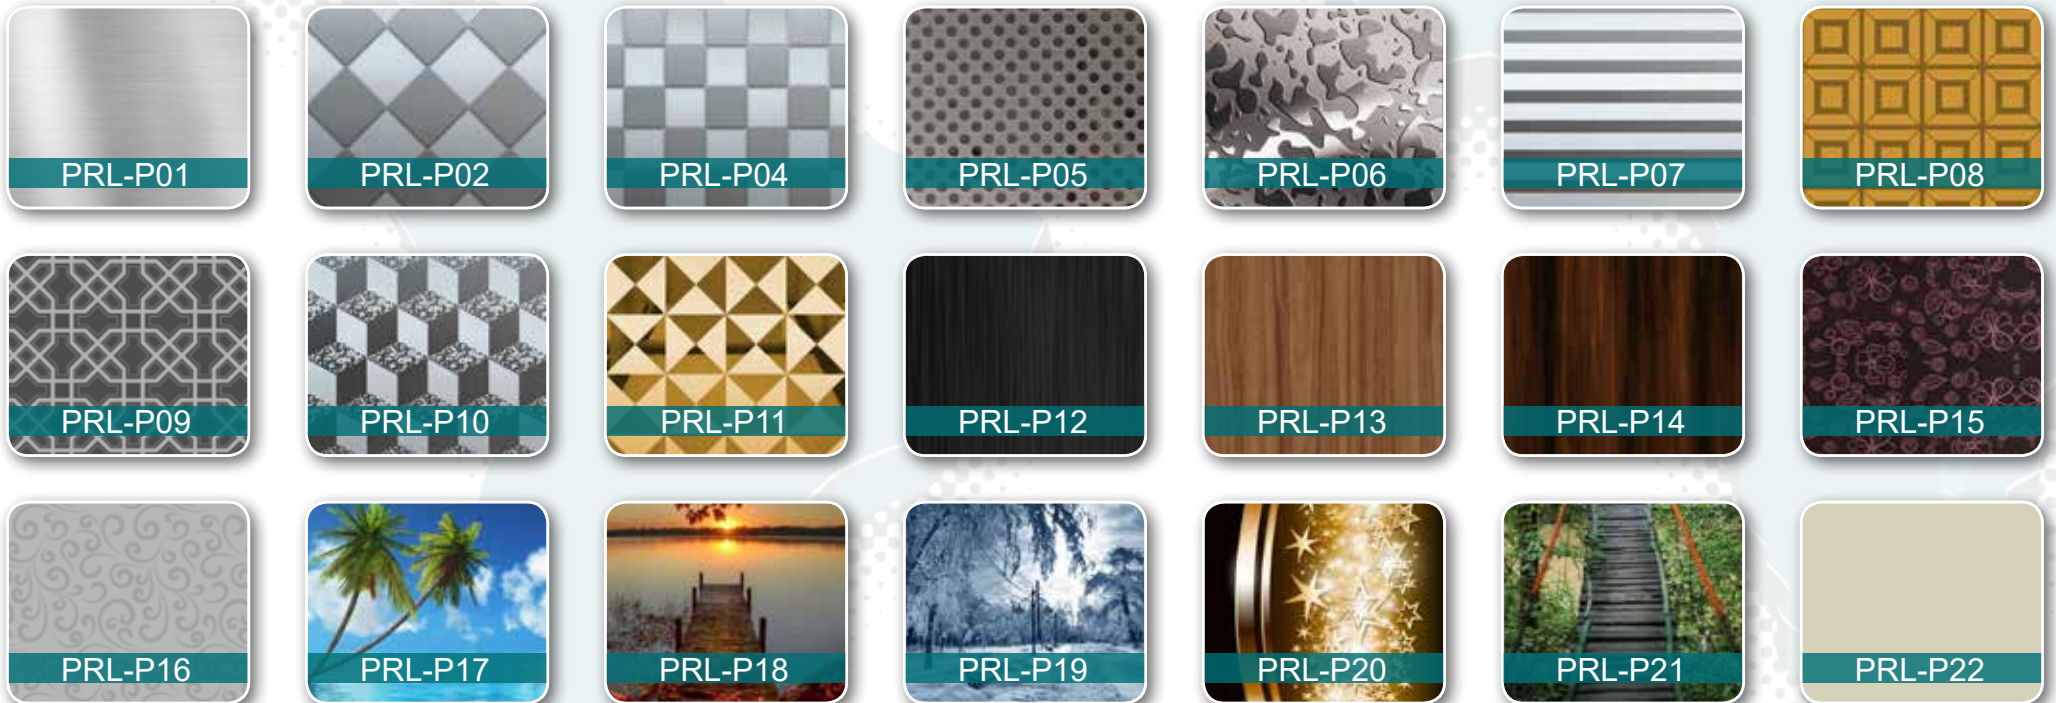

Tavan Mocelleri/ Ceiling Models



PRL-T01




PRL-T02



PRL-T03



PRL-T04



PRL-T05



PRL-T06



PRL-T07



PRL-T08



PRL-T09



PRL-T10



PRL-T11



PRL-T12




PRL-T13




PRL-T14



PRL-T15



PRL-T16




PRL-T17



PRL-T18



PRL-T19



PRL-T20



PRL-T21



PRL-T22



PRL-T23



PRL-T24




PRL-T25



PRL-T26



PRL-T27




PRL-T28

PRL-MR-DAS

PRL-MRL-AAS

PRL-MRL-UAS

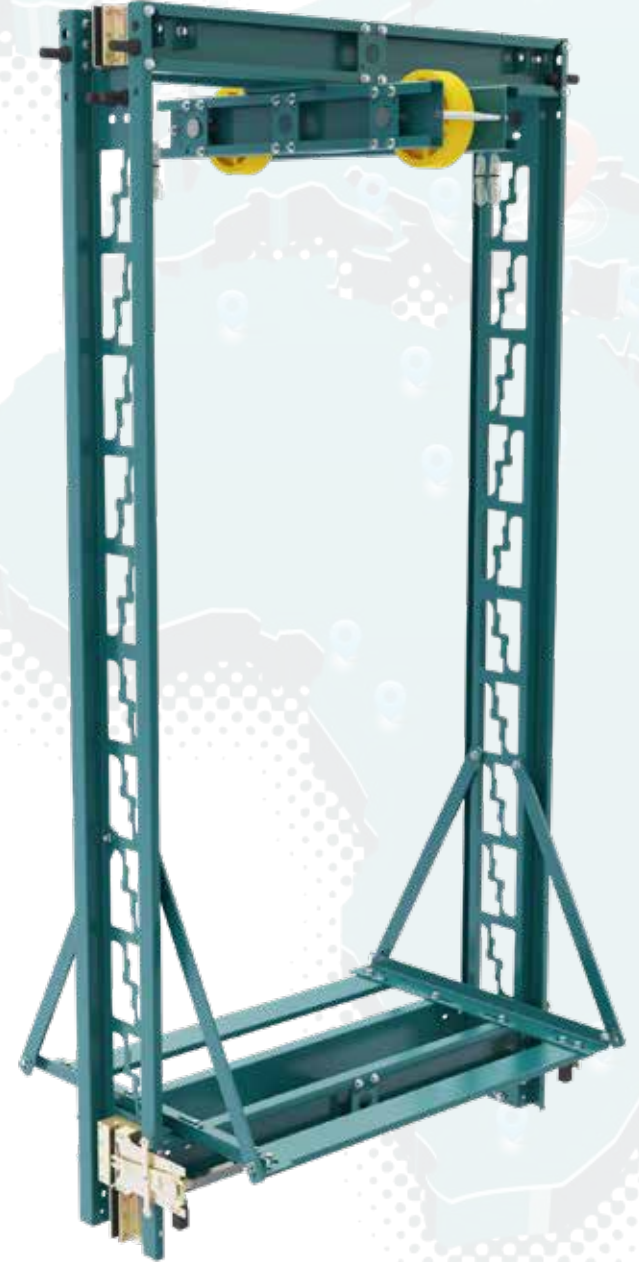

PRL-MRL-MDZ



PRL-MRL-DKMDZ




PRL-MRL-UAS



PRL-MTR01



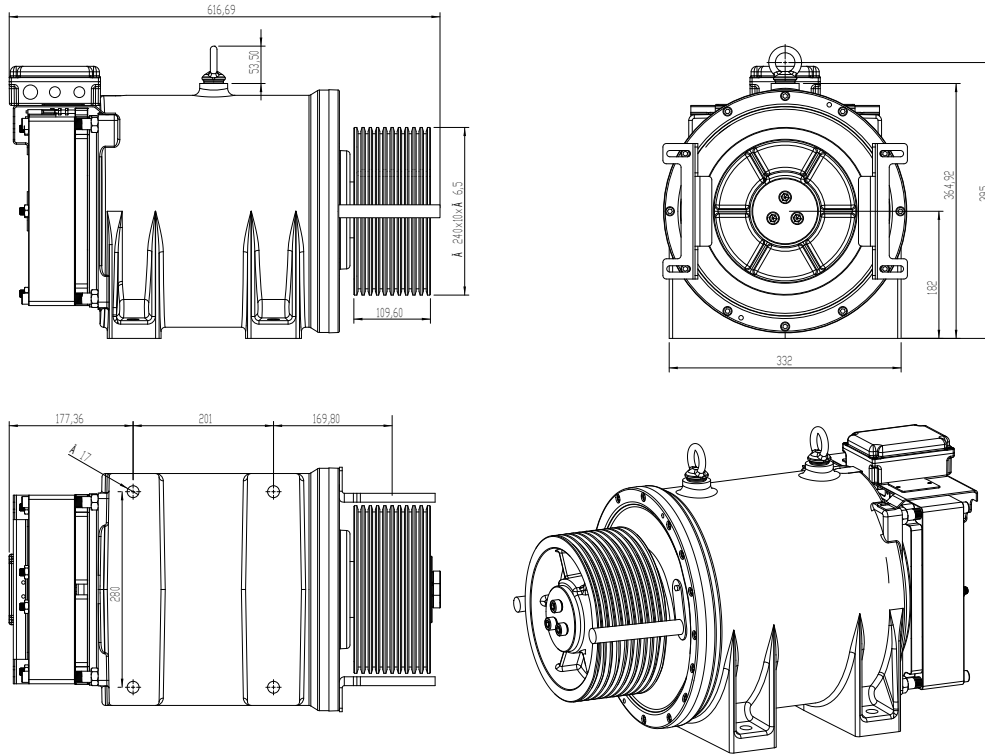



Hız Speed (m/s)	Kapasite Capacity (Kg)	Kasnak Pulley (mm)	Güç Power (Kw)	Akım In (A)	Kutup-Frekans Pole-Frequency	Devir Revolution (Rpm)	Tork Torque (Nm)
0,63	320	240x4x6,5	1,4	4,5	20P - 16.67Hz	100	132
	400	240x5x6,5	1,7	6	20P - 16.67Hz	100	164
	480	240x5x6,5	2,1	7	20P - 16.67Hz	100	196
	630	240x7x6,5	2,7	8,5	20P - 16.67Hz	100	258
	800	240x8x6,5	3,5	12	20P - 16.67Hz	100	328
	1000	240x10x6,5	4,3	12	20P - 16.67Hz	100	410
1,00	320	240x4x6,5	2,2	5,5	20P - 26.66Hz	160	132
	400	240x5x6,5	2,8	7,5	20P - 26.66Hz	160	164
	480	240x5x6,5	3,3	9	20P - 26.66Hz	160	196
	630	240x7x6,5	4,4	12	20P - 26.66Hz	160	258
	800	240x8x6,5	5,5	14,5	20P - 26.66Hz	160	328
	1000	240x10x6,5	6,9	18	20P - 26.66Hz	160	410
1,60	320	240x4x6,5	3,5	9,5	20P - 42.5Hz	255	132
	400	240x5x6,5	4,4	11,5	20P - 42.5Hz	255	164
	480	240x5x6,5	5,3	14	20P - 42.5Hz	255	196
	630	240x7x6,5	6,9	18	20P - 42.5Hz	255	258
	800	240x8x6,5	8,8	22	20P - 42.5Hz	255	328
	1000	240x10x6,5	11	27,5	20P - 42.5Hz	255	410
2,00	320	240x4x6,5	4,4	11	20P - 53.16Hz.	319	132
	400	240x5x6,5	5,5	13	20P - 53.16Hz.	319	164
	480	240x5x6,5	6,6	16	20P - 53.16Hz.	319	196
	630	240x7x6,5	8,6	20	20P - 53.16Hz.	319	258
	800	240x8x6,5	11	26	20P - 53.16Hz.	319	328
	1000	240x10x6,5	13,7	32	20P - 53.16Hz.	319	410
2,50	320	240x4x6,5	5,5	13	20P - 66.33Hz.	398	132
	400	240x5x6,5	6,9	16	20P - 66.33Hz.	398	164
	480	240x5x6,5	8,2	19	20P - 66.33Hz.	398	196
	630	240x7x6,5	10,8	25	20P - 66.33Hz.	398	258
	800	240x8x6,5	13,7	32	20P - 66.33Hz.	398	328
	1000	240x10x6,5	17,1	40	20P - 66.33Hz.	398	410

PRL-DMS



PRL-DZMS

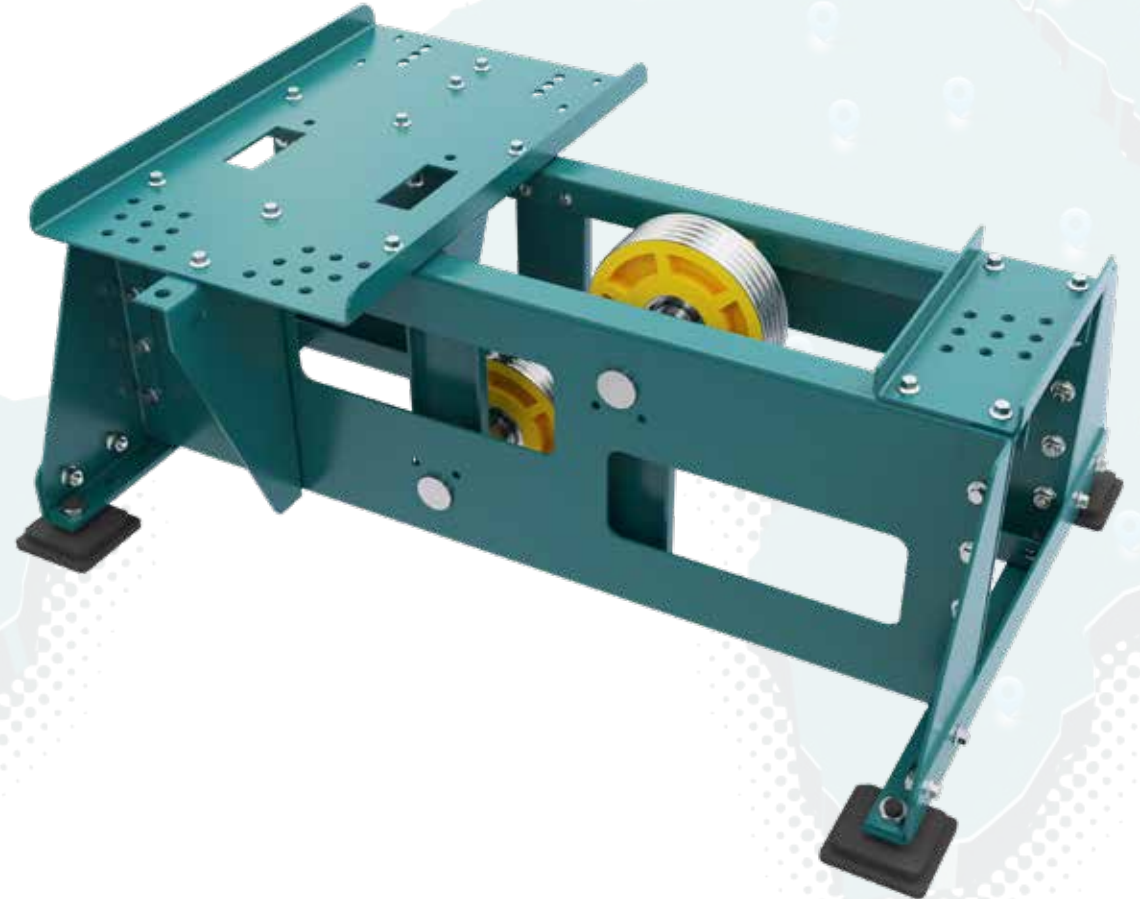

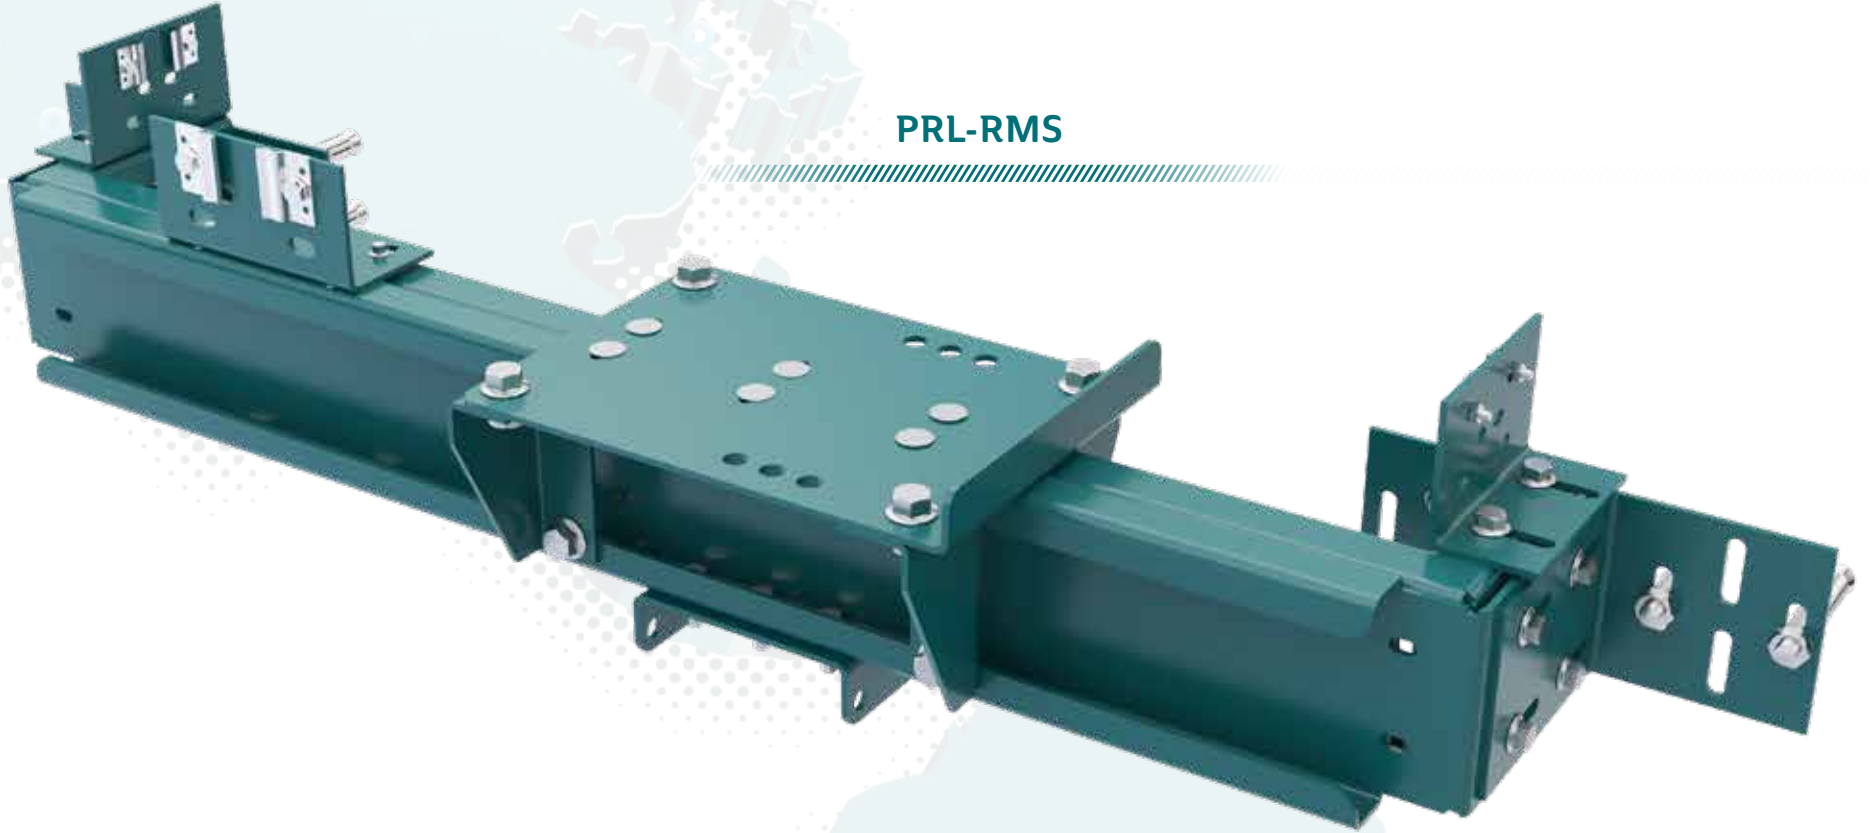

PRL-RMS



320 Kg 4 Kişi 4 Person		400 Kg 5 Kişi 5 Person		450 Kg 6 Kişi 6 Person		630 Kg 8 Kişi 8 Person		800 Kg 10 Kişi 10 Person		1000 Kg 13 Kişi 13 Person		1275 Kg 16 Kişi 16 Person		1600 Kg 20 Kişi 20 Person	
Min m²	0,79 m²	Min m²	0,98 m²	Min m²	1,17 m²	Min m²	1,45 m²	Min m²	1,73 m²	Min m²	2,15 m²	Min m²	2,57 m²	Min m²	3,13 m²
Max m²	0,97 m²	Max m²	1,16 m²	Max m²	1,30 m²	Max m²	1,66 m²	Max m²	2,00 m²	Max m²	2,40 m²	Max m²	2,95 m²	Max m²	3,56 m²

KUYU ÖLÇÜLERİ / SHAFT DIMENSIONS

Genişlik	Derinlik	Genişlik	Derinlik	Genişlik	Derinlik	Genişlik	Derinlik	Genişlik	Derinlik	Genişlik	Derinlik	Genişlik	Derinlik	Genişlik	Derinlik
Width	Depth	Width	Depth	Width	Depth	Width	Depth	Width	Depth	Width	Depth	Width	Depth	Width	Depth
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
900	900	1000	1000	1100	1100	1250	1250	1400	1400	1500	1600				
950	950	1050	1050	1050	1200	1200	1300	1350	1450	1450	1650				
900	1000	1100	1050	1000	1300	1100	1400	1300	1500	1400	1700				
		900	1200					1250	1550	1350	1750				
								1200	1600	1300	1800				
										1250	1850				
										1200	1900				
										1100	2000				





Prima
Power



Prima
Power

Prima Power EBo
TheGENO



PROLIFT
ELEVATOR

**THAT'S ONE SMALL STEP FOR MAN
ONE GIANT LEAP FOR MANKIND**

NEIL ARMSTRONG



Kontaktörsüz ve Sessiz
Contactless and Silent



Kabin Üstü Revizyon Kutusu
Car Roof Inspection Box



Kuyu Dibi Revizyon Kutusu
Shaft Pit Inspection Box



EN 81-20/50



EN 81-1/-2+A3



EN 81-70



EN 81-72



EN 81-73



EN 81-77

Kontaktörsüz ve Sessiz
Contactless and Silent



EN 81-20/50



EN 81-1/-2+A3



EN 81-70



EN 81-72



EN 81-73



EN 81-77

Kabin Üstü Revizyon Kutusu
Car Roof Inspection Box



Kuyu Dibi Revizyon Kutusu
Shaft Pit Inspection Box



PRL-AKS-03



- Yıldız-üçgen, doğrudan ve Soft-Starter ile yol verme seçenekleri
- A3 (UCM) Valf desteği
- 12 saatte bir valf kontrolü
- Yardımcı motor ile seviye düzeltme
- Birçok popüler hidrolik tahrik ünitesi ile uyumlu
 - › Bucher i-Valve (Bucher i-Valve kontrol kartıyla işbirliği ile UCM kontrolü)
 - › Bucher ELRV-A
 - › Kleemann EV100
 - › OMAR Soft Stop
 - › GMV 3010EN
 - › GMV 3010S
 - › IGV ve diğer onlarca model
- Enerji kesintilerinde 600VA UPS ile otomatik kurtarma

- Star-delta, direct and Soft-Starter starting alternatives
- Support of A3 (UCM) valve
- Valve checking every 12 hours
- Re-leveling with auxiliary motor
- Compatible with many popular hydraulic drive units
 - › Bucher i-Valve (UCM checking in co-operation with Bucher i-Valve controller)
 - › Bucher ELRV-A
 - › Kleemann EV100
 - › OMAR Soft Stop
 - › GMV 3010EN
 - › GMV 3010S
 - › IGV and tens of other drive types
- Automatic rescue during mains black-out with a 600VA UPS



EN 81-20/50



EN 81-1/-2+A3



EN 81-70



EN 81-73



EN 81-77




PRL-AKS-04

- Harici 220VAC veya UPS için terminaller
- Kumanda sistemi ve MD-STO invertere erişim imkanı sağlayan ortak ekran ve tuş takımı
- Geri-al kumanda
- Elle fren açtırma
- *Terminals for external UPS or 220VAC power supply*
- *Common screen and keypad for controller and MD-STO inverter*
- *Re-call switch and buttons*
- *Manual brake release*


Kontaktörsüz ve Sessiz
Contactless and Silent



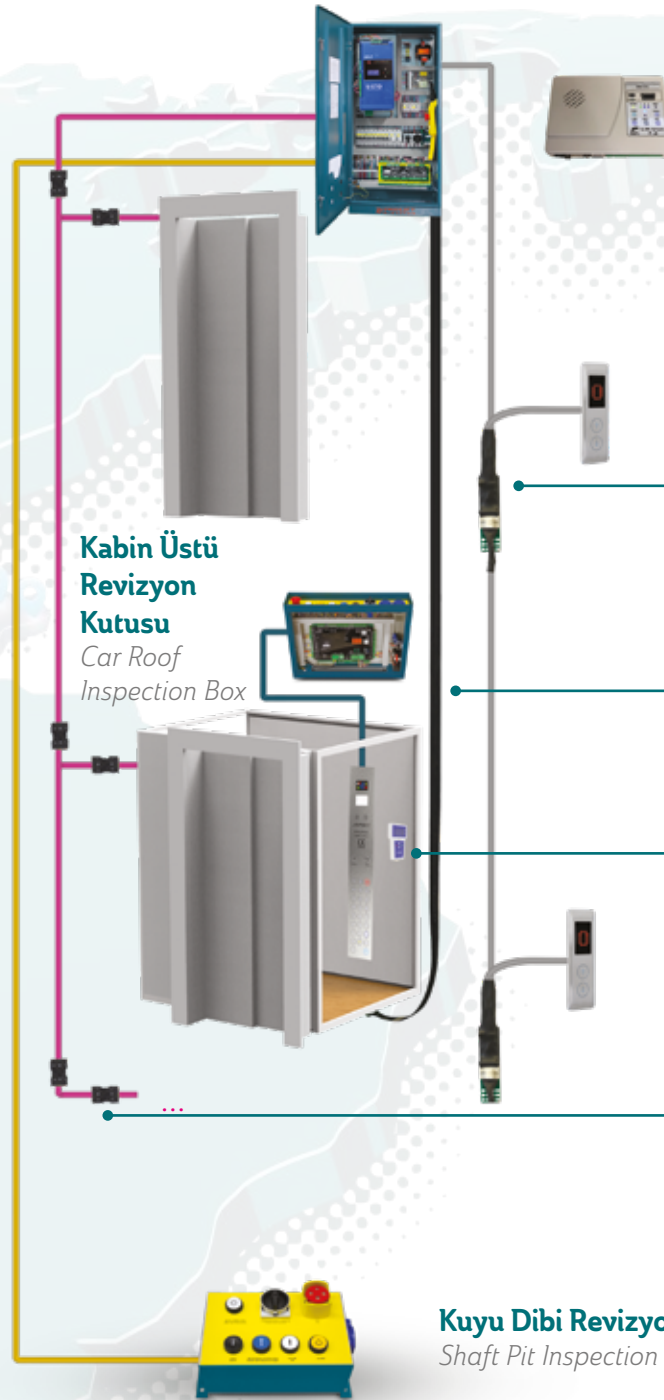



EN 81-28 ve uzaktan izleme
EN 81-28 and remote monitoring

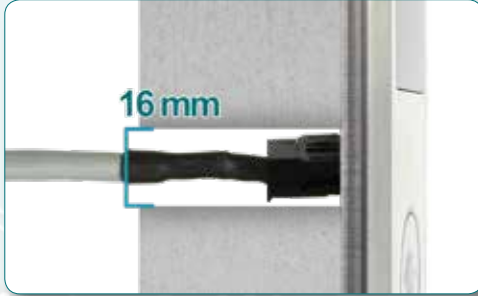

Tek soketle kolay bağlantı
Easy connect with single connector



Soketli yassı kablo
Flexible travelling cable with connectors



El terminali ile kabinden ayar imkanı
Access to system menu from the car via hand terminal




Kapı kontak soketleri
Door contact connectors

TEKNİK ÖZELLİKLER

- BİRÜNİ 364, 220 VAC motorlu merkezi asansör kapıları için tasarlanmış, yüksek konforlu kapı kumandası için gelişmiş birçok özelliği üzerinde barındıran, esnek tasarımı sayesinde farklı kapı uygulamaları için kullanıma uygun akıllı bir asansör kabin kapısıdır.
- BİRÜNİ 364, donanım olarak vektör kontrolü ve yüksek çözünürlüklü enkoder girişi ile motora tam hakimiyet sağlar.
- BİRÜNİ 364, yangın asansörleri kapılarında kullanıma uygundur.

TECHNICAL SPECIFICATIONS

- BİRÜNİ 364, is an "intelligent" door control board designed for automatic central lift doors with 220 VAC reduction gear motor. It provides advance features for high comfort, high dynamic performance and flexible usage.
- BİRÜNİ 364, provides complete hold of the motor with its vector control and high resolution encoder input hardware.
- BİRÜNİ 364, door controller is suitable for using on fire rated elevator doors.

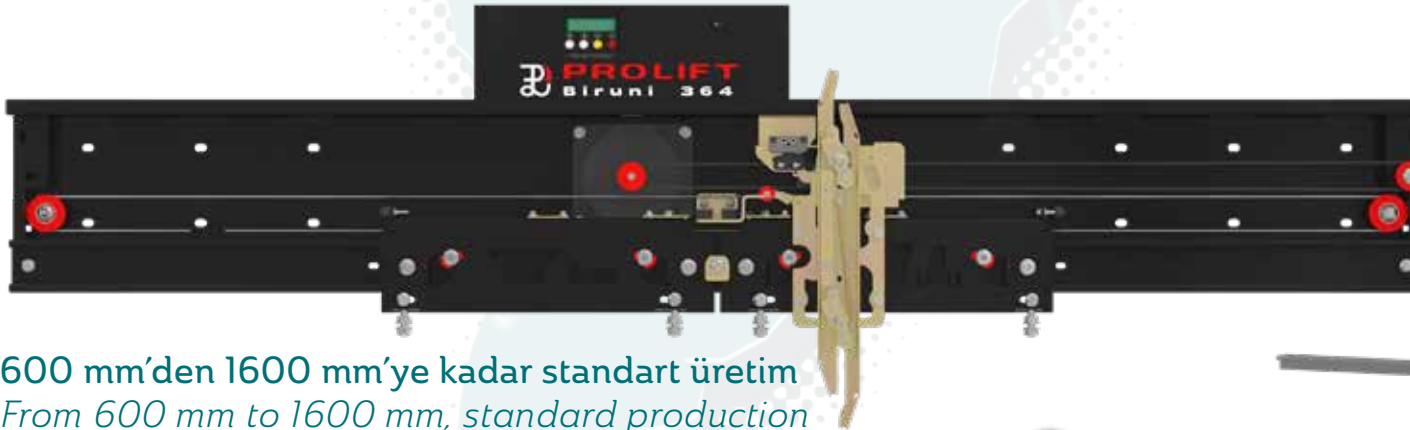

600 mm'den 1600 mm'ye kadar standart üretim
From 600 mm to 1600 mm, standard production



2 PANEL MERKEZİ KAT KAPISI 2 PANEL CENTRAL LANDING DOOR

CE C-150
PRL/C-150/O15/C2

PROLIFT
Biruni 364

TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Steanless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal


600 mm'den 1400 mm'ye kadar standart üretim
From 600 mm to 1400 mm, standard production

Bir gün bakım

364 gün kesintisiz çalışma...

One day of maintenance

364 days of continuous work...

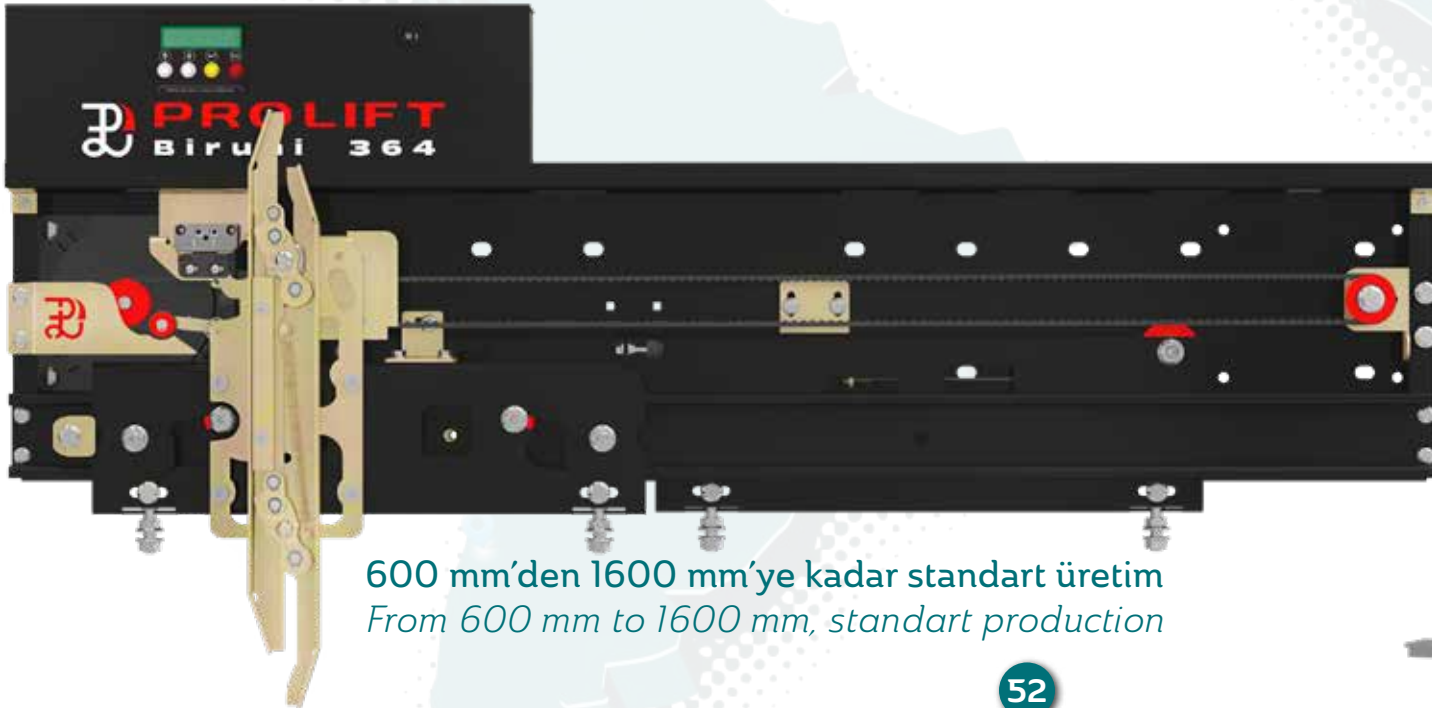

600 mm'den 1600 mm'ye kadar standart üretim
From 600 mm to 1600 mm, standart production



2 PANEL TELESKOPİK KAT KAPISI 2 PANEL TELESCOPIC LANDING DOOR

CE C-150
PRL/C-150/O15/T2

PROLIFT
Biruni 364

TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Steanless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal

600 mm'den 1400 mm'ye kadar standart üretim

From 600 mm to 1400 mm, standard production



2 PANEL MERKEZİ KABİN KAPISI 2 PANEL CENTRAL CAR DOOR

CE C-250
PRL/C-250/015/C2

TEKNİK ÖZELLİKLER

- ÜRETİMDEKİ KAPI ARALIĞI : 600mm & 1400mm
- Değişik motor ve sürücüler ile farklı kullanım olanakları
- Kompakt yapısı sayesinde montaj kolaylığı
- Orta ve yoğun trafikli binalar için seçim
- Yükten bağımsız çalışma özelliği
- Ağır hizmet kapılarına göre programlanma özelliği
- Brushless motor sürme özelliği sayesinde trafiği yoğun ve yüksek hızlı asansörlerde 1m/s hızda aranılan en iyi çözüm
- Düşük enerji tüketimi

TECHNICAL SPECIFICATIONS

- DOOR PRODUCTION CAPACITY : 600mm & 1400 mm
- Different usage options with various motor and drives
- Opportunities for ease of installations
- Choice for much-used and less-used elevator of buildings
- Ability to work independently from the load programmable feature
- According to the heavy - duty doors
- Brushless motor drive feature offers the heavy traffic and high - speeds elevators, 1 m/s speed on demand offers the best solution
- Low energy consumption



600 mm'den 1400 mm'ye kadar standart üretim
From 600 mm to 1400 mm, standard production

2 PANEL MERKEZİ KAT KAPISI 2 PANEL CENTRAL LANDING DOOR

C E C-150
PRL/C-150/015/C2

TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Steanless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in hight-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal

600 mm'den 1400 mm'ye kadar standart üretim
From 600 mm to 1400 mm, standard production

2 PANEL TELESKOBİK KABİN KAPISI

2 PANEL TELESCOPIC CAR DOOR

**C-250**
PRL/C-250/O15/T2

KONTROL KARTI

- 24V DV fırçalı ve brushless motor sürme özelliği
- Kartta sinyal çıkışı
- Tek ve çift sinyalle çalışma özelliği
- Limit switch'siz çalışma özelliği
- Seyir mesafesini otomatik öğrenme modu
- Ayarlanabilir çarpma torku
- Kapalı çevrim çalışması
- Kolay kullanım menüsü
- PID kontrollü sessiz ve akıcı çalışma özelliği
- Hata kayıt özelliği
- Çok hızda yüksek konforlu duruş hassasiyeti
- Fotosel girişi
- Açma Kapama sayacı
- DEMO modunda çalışma özelliği

CONTROL CARD

- 24V DC brush and brushless motor drive feature
- Signal output on the card
- Single and double signal working feature
- Automatic learning mode
- Adjustable multiplication
- Closed - loop operation
- Easy to use menu
- PID control feature silent and smooth operation
- Error recording feature
- Multi - speed high - precision comfortable posture
- Photocell input
- Keyless Entry counter
- Ability to work in DEMO mode

600 mm'den 1400 mm'ye kadar standart üretim
From 600 mm to 1400 mm, standard production



2 PANEL TELESKOBİK KAT KAPISI 2 PANEL TELESCOPIC LANDING DOOR

C E C-150
PRL/C-150/015/T2

TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Steanless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal

600 mm'den 1400 mm'ye kadar standart üretim

From 600 mm to 1400 mm, standard production



2 PANEL MERKEZİ CAM KABİN KAPISI 2 PANEL CENTRAL GLASS CAR DOOR

C-250
PRL/C-250/015/C2/LGC

600 mm'den 1400 mm'ye kadar standart üretim
From 600 mm to 1400 mm, standard production



2 PANEL MERKEZİ CAM KAT KAPISI 2 PANEL CENTRAL GLASS LANDING DOOR

C E C-150
PRL/C-150/M02/LGC

TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Stainless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal



2 PANEL TELESKOBİK CAM KABİN KAPISI 2 PANEL TELESCOPIC GLASS CAR DOOR

C-250
PRL/C-250/015/T2

600 mm'den 1400 mm'ye kadar standart üretim
From 600 mm to 1400 mm, standard production



2 PANEL TELESKOBİK CAM KAT KAPISI 2 PANEL TELESCOPIC GLASS LANDING DOOR

C € C-150
PRL/C-150/PRL01/T02/LG

TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Stainless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal



E 60 EW60

3 PANEL TELESKOBİK KABİN KAPISI

3 PANEL TELESCOPIC CAR DOOR

PRLO3
T03C/SERİ 14

TEKNİK ÖZELLİKLER


- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Stainless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many parts for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal

700 mm'den 1800 mm'ye kadar standart üretim

From 700 mm to 1800 mm, standard production

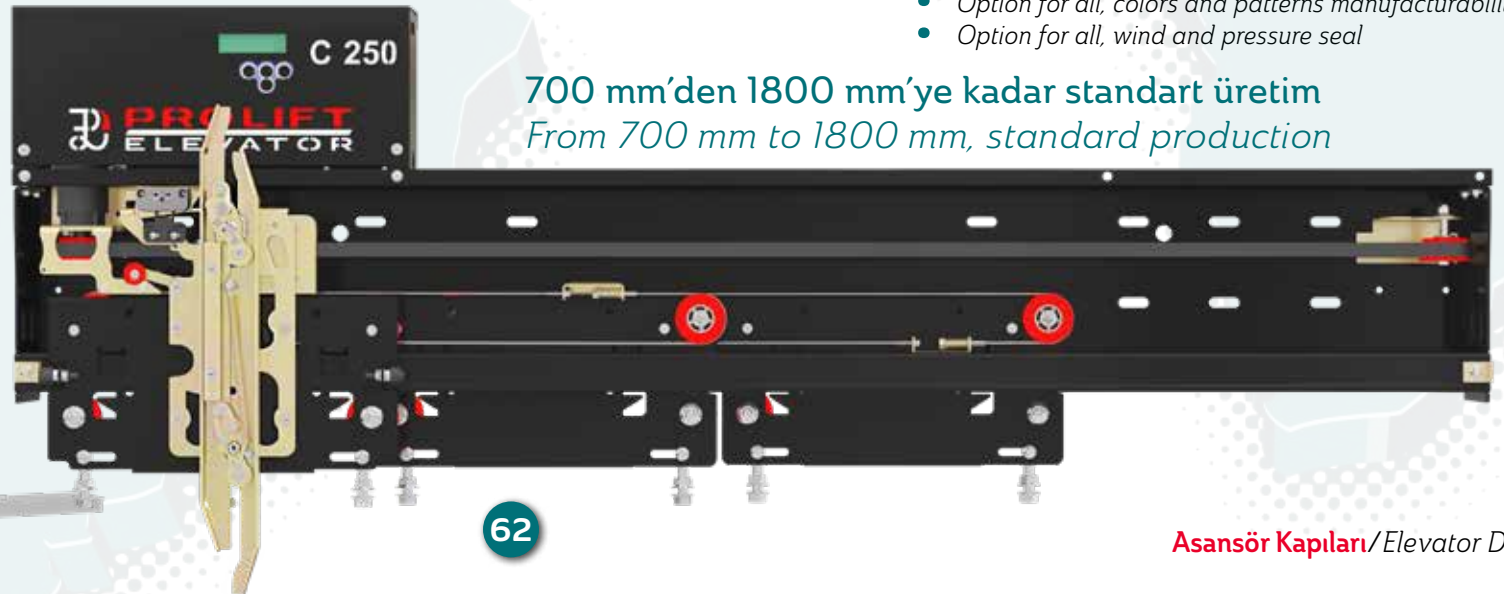

3 PANEL TELESKOBİK KAT KAPISI 3 PANEL TELESCOPIC LANDING DOOR

PRLO3
TO3L/SERİ 14

TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğini uyumlu hale getirebilme
- 1mm - 1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses, rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATIONS

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock Spring adjustment
- Spring stiffness adjustment
- Stainless sill design on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to adjust
- Production of panel and frame using 1mm - 1.5mm thickness stainless steel
- Long lasting and unproblematic working using stainless steel
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box
- Human health and safety with outstanding product dare the first designing the product
- Option for all, colors and patterns manufacturability
- Option for all, wind and pressure seal

700 mm'den 1800 mm'ye kadar standart üretim
From 700 mm to 1800 mm, standard production



4 PANEL ÇİFT MOTOR MERKEZİ KABİN KAPISI
4 PANEL DOUBLE MOTOR CENTRAL CAR DOOR



C-250

PRL/C-250/015/C4/M2/SERİ 14

1400 mm'den 3000 mm'ye kadar standart üretim
From 1400 mm to 3000 mm, standard production



4 PANEL ÇİFT MOTOR MERKEZİ KAT KAPISI
4 PANEL DOUBLE MOTOR CENTRAL LANDING DOOR

C € C-150 M2
PRL / C-150 / 015 / C4 / L2 / SERİ 14

1400 mm'den 3000 mm'ye kadar standart üretim
From 1400 mm to 3000 mm, standard production



4 PANEL TEK MOTOR MERKEZİ KABİN KAPISI

4 PANEL SINGLE MOTOR CENTRAL CAR DOOR

**C250****PRL/C-250/015/C4/M2/SERİ 14**

TEKNİK ÖZELLİKLER


- ÜRETİMDEKİ KAPI ARALIĞI : 700mm & 1600mm
- Değişik motor ve sürücüler ile farklı kullanım olanakları
- Kompakt yapısı sayesinde montaj kolaylığı
- Orta ve yoğun trafikli binalar için seçim
- Yükten bağımsız çalışma özelliği
- Ağır hizmet kapılarına göre programlanma özelliği
- Brushless motor sürme özelliği sayesinde trafiği yoğun ve yüksek hızlı asansörlerde 1m/s hızda aranan en iyi çözüm
- Düşük enerji tüketimi

TECHNICAL SPECIFICATIONS

- DOOR PRODUCTION CAPACITY : 700mm & 1600 mm
- Different usage options with various motor and drives
- Opportunities for ease of installations
- Choice for much-used and less-used elevator of buildings
- Ability to work independently from the load programmable feature
- According to the heavy - duty doors
- Brushless motor drive feature offers the heavy traffic and high - speeds elevators, 1 m/s speed on demand offers the best solution
- Low energy consumption

700 mm'den 1600 mm'ye kadar standart üretim

From 700 mm to 1600 mm, standard production

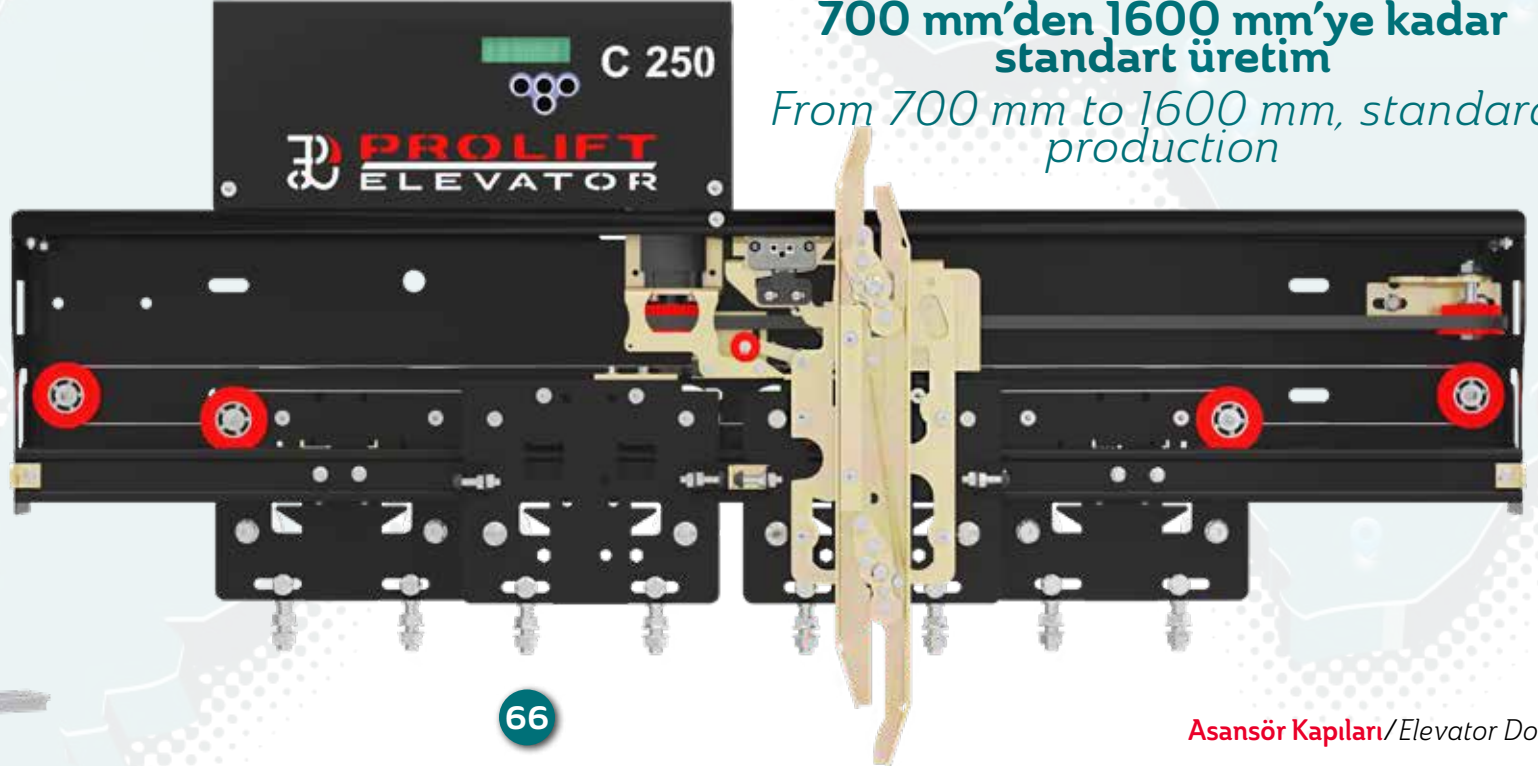

4 PANEL TEK MOTOR MERKEZİ KAT KAPISI 4 PANEL SINGLE MOTOR CENTRAL LANDING DOOR

CE **PRLO4**
MO4/L/SERİ 14


TEKNİK ÖZELLİKLER

- EN 81 - 20 - 50 EN 81 - 58 Standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğine uyumlu hale getirebilme
- 1mm-1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür.
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir montörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik

TECHNICAL SPECIFICATION

- Production suitable for EN 81 - 20 - 50 and EN 81 - 58 standards
- Lock spring adjustment
- Spring stiffness adjustment
- Stainless sill desing on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to just
- 1 mm- 1.5 mm thickness and option in stainless steel panel and frame production
- Direct and long-lasting use of stainless, and runs smoothly
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed
- Optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box.
- Human health and safety with outstanding product design
- Option for all, colors and patterns manufacturability

700 mm'den 1600 mm'ye kadar standart üretim
From 700 mm to 1600 mm, standard production

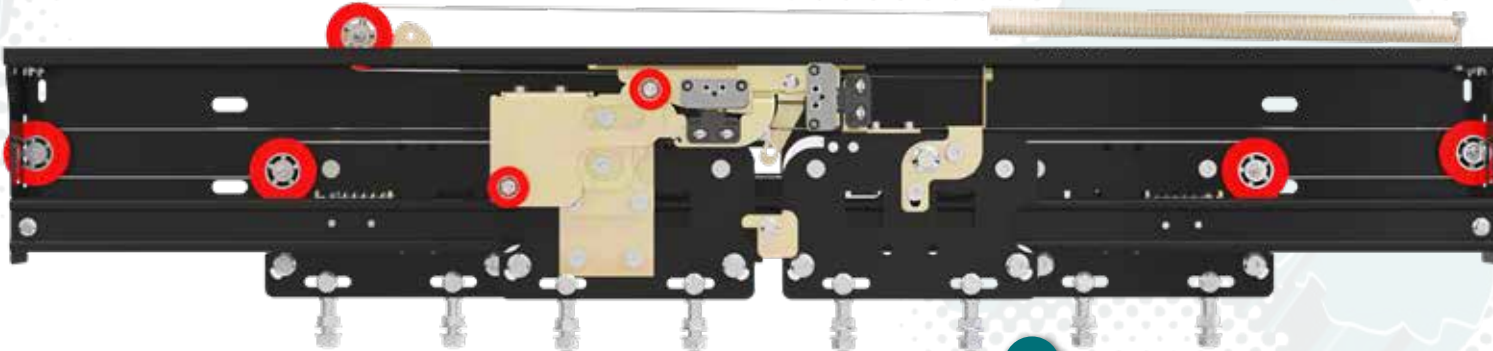

6 PANEL MERKEZİ KABİN KAPISI-2 KAŞIK

6 PANEL CENTRAL CAR DOOR- 2 SKATE

CE **PRLO6**
M06/C/SERİ 14

TEKNİK ÖZELLİKLER


- ÜRETİMDEKİ KAPI ARALIĞI : 1600MM & 3000MM
- Değişik motor ve sürücüler ile farklı kullanım olanakları sunar
- Kompakt yapısı sayesinde montaj kolaylığı sağlar
- Orta ve yoğun trafikli binalar için seçim sağlar
- Ağır hizmet kapılarına göre programlanma özelliği
- Brushless motor sürme özelliği sayesinde trafiği yoğun ve yüksek hızlı asansörlerde 1 m/s hızda aranan en iyi çözümü sunar
- Düşük enerji tüketimi

TECHNICAL SPECIFICATION

- DOOR PRODUCTION CAPACITY : 1600MM & 3000MM
- Different uses with different engines and drives offers opportunities and ease of assembly
- Provides choice for medium and heavy traffic buildings
- Ability to work independently from the load programmable feature
- according to the heavy-duty doors
- Brushless motor drive feature offers the heavy traffic and high-speed elevators, 1 m/s speed on demand offers the best solution
- Low energy consumption

1600 mm'den 3000 mm'ye kadar standart üretim

From 1600 mm to 3000 mm, standard production

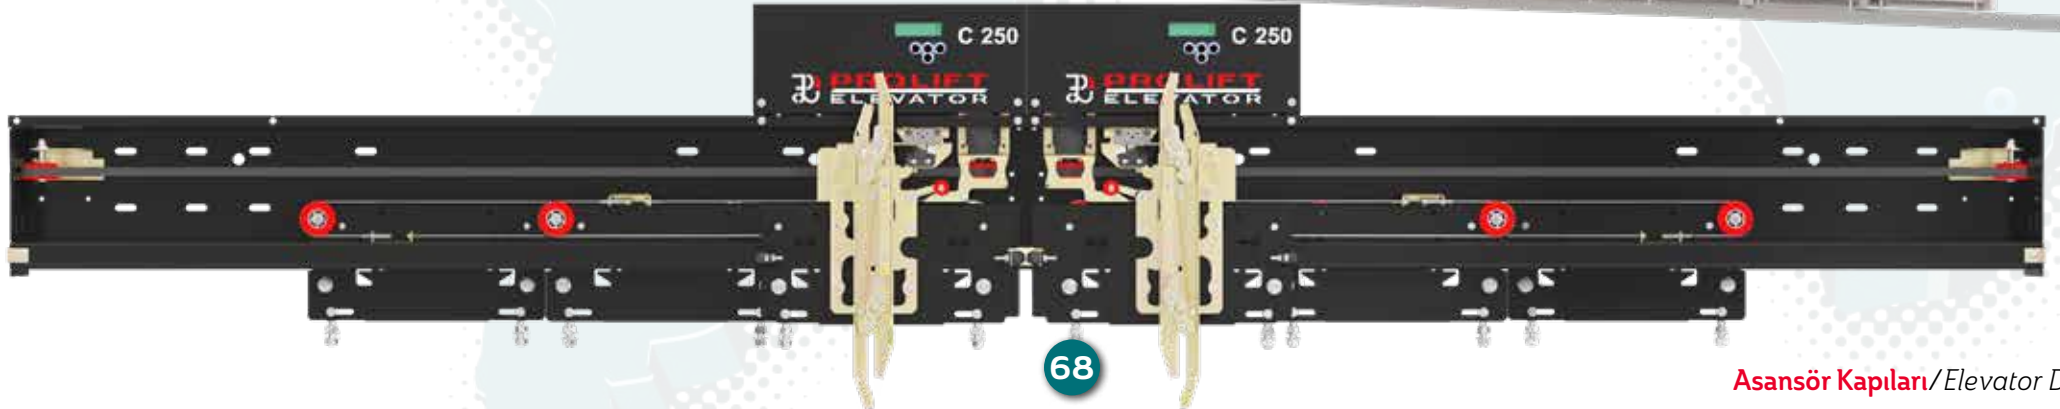

6 PANEL MERKEZİ KAT KAPISI-2 KAŞIK 6 PANEL CENTRAL LANDING DOOR- 2 SKATE


PRLO6
M06/L/SERİ 14

TEKNİK ÖZELLİKLER

- EN 81-20 EN 81-58 standartlarında üretim yapılmaktadır.
- Kilit pozisyon ayarı
- Yay sertlik ayarı
- Ağır hizmet kapılarında çelik eşik tasarımı
- Aynı modelde erken açmaya uyumlu hale gelebilme özelliği
- Yüksek hızlı ve trafiği yoğun asansörlerde erken açma özelliğine uyumlu hale getirebilme
- 1 mm-1.5mm arası kalınlıkta direkt paslanmazdan isteğe bağlı panel ve kasa üretimi
- Direkt paslanmaz kullanımı sayesinde uzun ömürlü ve sorunsuz çalışma
- Kaynaksız üretim teknolojisi
- Kolay ve hatasız montaj için bir çok bağlantı noktasında kendinden referanslı birleşimler tasarlanmış olup, kendi içinde çözüm üreten bir tasarım ürünüdür.
- Ambalajın açılmasından montajın tamamlanmasına kadar tek bir monitörle montaj yapma kolaylığı
- İnsan sağlığı ve güvenliği öne çıkan ürün tasarımı
- İsteğe bağlı olarak bütün renk ve desenlerde üretilebilirlik
- İsteğe bağlı ses,rüzgar ve basınç yalıtımı

TECHNICAL SPECIFICATION

- EN 81-20-50 EN 81-58 Standard production
- Lock spring adjustment
- Spring stiffness adjustment
- Stainless sill desing on heavy duty doors
- Ability to become compatible to open early in the same model
- Ability to become compatible to open early in the same model
- Ability to open early in high-speed and heavy lift to bring and to just
- 1 mm- 1.5 mm thickness and option in stainless steel panel and frame production
- Direct and long-lasting use of stainless, and runs smoothly
- Seamless production technology
- In many ports for easy and accurate installation self-referencing combination designed
- Optional production in all products
- Easy installation from opening to the box to completion of the assembly all in one box.
- Human health and safety with outstanding product design
- Option for all, colors and patterns manufacturability

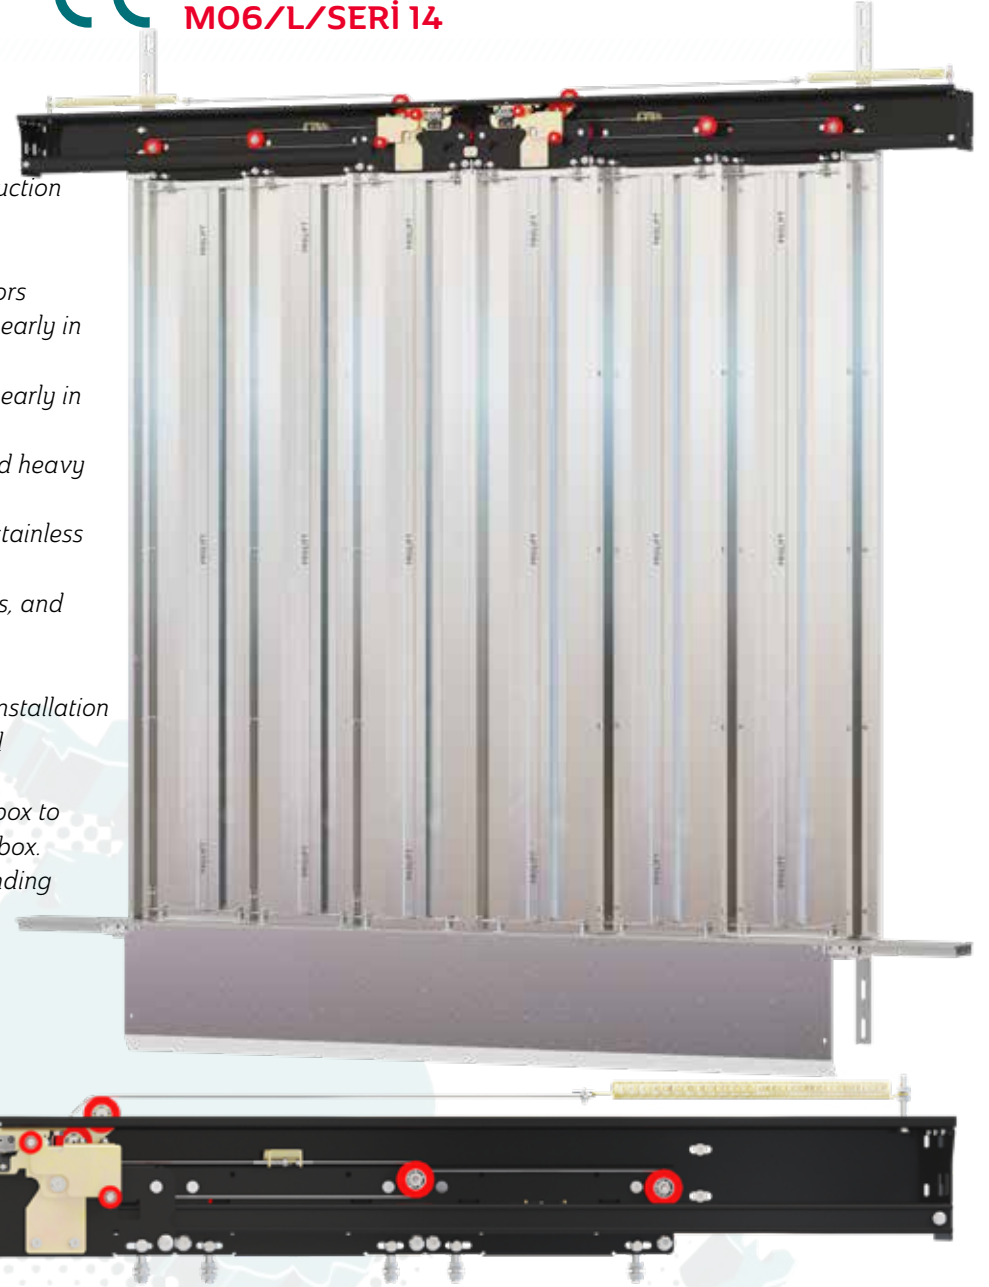



TYPE EXAMINATION CERTIFICATE FOR LIFTCOMPONENTS

Certificate no.: NL16-400-1003-110-08 Revision no.: 1
Description of the product: Safety contact for door locking device
Trademark, type: Prolift, PRL-6MP-612
Name and address of the manufacturer: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Name and address of the certificate holder: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: EN 81-58:2003
Test laboratory: LIFTINSTITUUT B.V., Amsterdam, The Netherlands
Date and number of the laboratory report: February 19th, 2014. Report belonging to the type examination certificate no. NL16-400-1003-110-08 rev.1
Date of type examination: November 2013 - February 2014, Rev.1, September 15, 2017
Additional document with this certificate: Report belonging to the type examination certificate no. NL16-400-1003-110-08 rev.1
Additional remarks: The performance criteria of the EN 81-58 covered are:
UL 230 VAC
5.5 A
UL Utilization Category AC-15
500 V
UL 4 kV
5.5 A
Furthermore see chapter 6 of the report belonging to the type examination certificate.
Conclusion: The lift component meets the requirements referred to in this certificate taking into account any additional remarks mentioned above.

Amsterdam
Date: 15-09-2017
Valid until: 15-09-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

LIFTINSTITUUT B.V. - Subkeuringsinstituut B.V. - P.O. Box 95071 - 1009 AB Amsterdam - The Netherlands
Registered at the Dutch court of appeal (01/150000)



TYPE EXAMINATION CERTIFICATE FIRE RESISTANCE OF LIFTS LANDING DOORS

Certificate no.: NL12-400-1003-110-052 Revision no.: 1
Description of the product: Fire resistant 2 panel central opening lift landing door
Trademark, type: Prolift, Central Opening Lift Landing door PRL C150-019 C2
Name and address of the manufacturer: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Name and address of the certificate holder: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: EN 81-58:2003
Test laboratory: EFFECTIS ENA AVRASSA
Date and number of the laboratory report: 25-09-2012, RPTN12015
Date of type examination: 25-09-2012, Rev.1, September 15, 2017
Classification: The performance criteria of the EN 81-58 covered is: EN-60
Additional document with this certificate: Report belonging to the type examination certificate no. NL12-400-1003-110-052 rev.1
Additional remarks: None
Conclusion: The Prolift landing door meets the requirements of the LR Directive, Annex I section 4.2 and the EN 81-58:2003, in particular for the classification indicated above.

Amsterdam
Date: 15-09-2017
Valid until: 15-09-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

LIFTINSTITUUT B.V. - Subkeuringsinstituut B.V. - P.O. Box 95071 - 1009 AB Amsterdam - The Netherlands
Registered at the Dutch court of appeal (01/150000)



TYPE EXAMINATION CERTIFICATE FIRE RESISTANCE OF LIFTS LANDING DOORS

Certificate no.: NL16-400-1003-110-112 Revision no.: 1
Description of the product: Fire resistant 2 panel central opening lift landing door
Trademark, type: Prolift, Central Opening Lift Landing door PRL C150-019-C2 S8
Name and address of the manufacturer: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Name and address of the certificate holder: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: EN 81-58:2003
Test laboratory: EFFECTIS ENA AVRASSA
Date and number of the laboratory report: 19-01-2016, RPTN16012
Date of type examination: December 21, 2015
Rev.1, September 29, 2017
Classification: The performance criteria of the EN 81-58 covered are:
UL 230 VAC
5.5 A
UL Utilization Category AC-15
500 V
UL 4 kV
5.5 A
Furthermore see chapter 6 of the report belonging to the type examination certificate.
Conclusion: The Prolift landing door meets the requirements of the LR Directive, Annex I section 4.2 and the EN 81-58:2003, in particular for the classification indicated above.

Amsterdam
Date: 29-09-2017
Valid until: 29-09-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

LIFTINSTITUUT B.V. - Subkeuringsinstituut B.V. - P.O. Box 95071 - 1009 AB Amsterdam - The Netherlands
Registered at the Dutch court of appeal (01/150000)



TYPE EXAMINATION CERTIFICATE FIRE RESISTANCE OF LIFTS LANDING DOORS

Certificate no.: NL08-400-1003-110-013 Revision no.: 1
Description of the product: Fire resistant side opening telescopic lift landing door
Trademark, type: Prolift, Telescopic Lift Landing door PRL C150-015 T2
Name and address of the manufacturer: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Name and address of the certificate holder: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: EN 81-58:2003
Test laboratory: FIPRES, s.r.o.
Date and number of the laboratory report: February 25, 2009, FIPRES-FR-011-09-AUNE
Date of type examination: February 6, 2009
Rev.1, September 15, 2017
Classification: The performance criteria of the EN 81-58 covered is: EN-60
Additional document with this certificate: Report belonging to the type examination certificate no. NL08-400-1003-110-01 rev.1
Additional remarks: None
Conclusion: The Prolift landing door meets the requirements of the LR Directive, Annex I section 4.2 and the EN 81-58:2003, in particular for the classification indicated above.

Amsterdam
Date: 15-09-2017
Valid until: 15-09-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

LIFTINSTITUUT B.V. - Subkeuringsinstituut B.V. - P.O. Box 95071 - 1009 AB Amsterdam - The Netherlands
Registered at the Dutch court of appeal (01/150000)



TYPE EXAMINATION CERTIFICATE FIRE RESISTANCE OF LIFTS LANDING DOORS

Certificate no.: NL16-400-1003-110-011 Revision no.: 1
Description of the product: Fire resistant side opening telescopic lift landing door
Trademark, type: Prolift, Telescopic Lift Landing door PRL C150-015 T2 S8
Name and address of the manufacturer: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Name and address of the certificate holder: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: EN 81-58:2003
Test laboratory: EFFECTIS ENA AVRASSA
Date and number of the laboratory report: 16-01-2016, RPTN16011
Date of type examination: December 21, 2015
Rev.1, September 29, 2017
Classification: The performance criteria of the EN 81-58 covered are:
UL 230 VAC
5.5 A
UL Utilization Category AC-15
500 V
UL 4 kV
5.5 A
Furthermore see chapter 6 of the report belonging to the type examination certificate.
Conclusion: The Prolift landing door meets the requirements of the LR Directive, Annex I section 4.2 and the EN 81-58:2003, in particular for the classification indicated above.

Amsterdam
Date: 29-09-2017
Valid until: 29-09-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

LIFTINSTITUUT B.V. - Subkeuringsinstituut B.V. - P.O. Box 95071 - 1009 AB Amsterdam - The Netherlands
Registered at the Dutch court of appeal (01/150000)



TYPE EXAMINATION CERTIFICATE FIRE RESISTANCE OF LIFTS LANDING DOORS

Certificate no.: NL08-400-1003-110-012 Revision no.: 1
Description of the product: Fire resistant side opening telescopic lift landing door
Trademark, type: Prolift, Telescopic Lift Landing door PRL C150-015 T2
Name and address of the manufacturer: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Name and address of the certificate holder: Prolift Asanlar San. ve Tic. Aş.
Büyükdere Mah. Büyükdere Cad. No:157A-157B
Nispetiye / Beşiktaş / İstanbul / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: EN 81-58:2003
Test laboratory: FIPRES, s.r.o.
Date and number of the laboratory report: February 25, 2009, FIPRES-FR-011-09-AUNE
Date of type examination: February 6, 2009
Rev.1, September 15, 2017
Classification: The performance criteria of the EN 81-58 covered is: EN-60
Additional document with this certificate: Report belonging to the type examination certificate no. NL08-400-1003-110-01 rev.1
Additional remarks: None
Conclusion: The Prolift landing door meets the requirements of the LR Directive, Annex I section 4.2 and the EN 81-58:2003, in particular for the classification indicated above.

Amsterdam
Date: 15-09-2017
Valid until: 15-09-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

LIFTINSTITUUT B.V. - Subkeuringsinstituut B.V. - P.O. Box 95071 - 1009 AB Amsterdam - The Netherlands
Registered at the Dutch court of appeal (01/150000)



TYPE EXAMINATION CERTIFICATE FIRE RESISTANCE OF LIFTS LANDING DOORS

Certificate no.: NL17-400-1002-110-01 Revision no.: 1
Description of the product: Fire resistant side opening telescopic lift landing door
Trademark, type: Prolift, Telescopic Lift Landing door PRL C150-018 T2
Name and address of the manufacturer: Prolift Asansör San. ve Tic. A.Ş.
Boydokteci Mah. Boykösküklü Cad. No:157/A-157/B
Niğde / Bursa / Turkey
Name and address of the certificate holder: Prolift Asansör San. ve Tic. A.Ş.
Boydokteci Mah. Boykösküklü Cad. No:157/A-157/B
Niğde / Bursa / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: EN 81-58:2009
Test laboratory: FRSS, s.r.o.
Date and number of the laboratory report: February 25, 2009, FRSS-FR/11-09-AUNE
Date of type examination: February 6, 2009
Rev 1: September 15, 2017
Classification: The performance criteria of the EN 81-58 standard are:
Telescopic Landing door PRL C150-018 T2 E E1 E30
Additional document with this certificate: Report belonging to the type examination certificate no. NL17-400-1002-110-01 Rev 1
Additional remarks: None
Conclusion: The Prolift landing door meets the requirements of the Lifts Directive, Annex I section 4.2 and the EN 81-58:2009, 3.1 particular for the classification indicated above.

Amsterdam
Date: 15-09-2017
Valid until: 15-09-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

Liftinstituut B.V. - Subordinatierapport 01 - P.O. Box 36071 - 1020 CA Amsterdam Netherlands - www.liftinstituut.nl
Registered in the Dutch trade register at 14120



TYPE EXAMINATION CERTIFICATE FOR LIFTCOMPONENTS

Certificate no.: NL17-400-1002-110-15 Revision no.: 1
Description of the product: Car door locking device for horizontal automatically operated sliding doors
Trademark, type: Prolift, PRL-C250-017
Name and address of the manufacturer: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Name and address of the certificate holder: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: Parts of: EN 81-20:2014 and EN 81-80:2014
Test laboratory: None
Date and number of the laboratory report: None
Date of type examination: November 2018 - April 2017
Additional document with this certificate: Report belonging to the type examination certificate no. NL17-400-1002-110-15REV 1
Additional remarks: Max. rated voltage: 230 VAC 200 VDC
Max. rated current: 0.5 A 0.5 A
Furthermore see chapter 5 of the report belonging to this type examination certificate.
Conclusion: The lift component meets the requirements referred to in this certificate taking into account any additional remarks mentioned above.

Amsterdam
Date: 18-04-2017
Valid until: 14-03-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

Liftinstituut B.V. - Subordinatierapport 01 - P.O. Box 36071 - 1020 CA Amsterdam Netherlands - www.liftinstituut.nl
Registered in the Dutch trade register at 14120



EU-TYPE EXAMINATION CERTIFICATE

Certificate no.: NL19-400-1002-110-10 Revision no.: 2
Description of the product: Door locking device for horizontal powered sliding landing doors
Trademark, type: Prolift, PRL-C150-018
Name and address of the manufacturer: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Name and address of the certificate holder: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: Parts of: EN81-12:1998+A3:2009, EN81-20:2014
Test laboratory: None
Date and number of the laboratory report: None
Date of EU-type examination: December 2014 - February 2015, November 2016 - April 2017
Additional document with this certificate: Report belonging to the EU-type examination certificate no. NL19-400-1002-110-10REV 2
Additional remarks: Max. rated voltage: 230 VAC 200 VDC
Max. rated current: 0.5 A 0.5 A
Furthermore see chapter 5 of the report belonging to this EU type examination certificate.
Conclusion: The safety component meets the requirements of the Lifts Directive 2014/33/EU taking into account any additional remarks mentioned above.

Amsterdam
Date: 18-04-2017
Valid until: 14-03-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

Liftinstituut B.V. - Subordinatierapport 01 - P.O. Box 36071 - 1020 CA Amsterdam Netherlands - www.liftinstituut.nl
Registered in the Dutch trade register at 14120



TYPE EXAMINATION CERTIFICATE FOR LIFTCOMPONENTS

Certificate no.: NL17-400-1002-110-08 Revision no.: 1
Description of the product: Automatic horizontal sliding landing and car doors
Trademark, type: Prolift, C152 and C250 series
Name and address of the manufacturer: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Name and address of the certificate holder: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: Parts of: EN 81-20:2014, EN 81-50:2014, EN81-71:2008 + A1:2006
Test laboratory: None
Date and number of the laboratory report: None
Date of type examination: November 2018 - April 2017
Additional document with this certificate: Report belonging to the type examination certificate no. NL17-400-1002-110-10REV 1
Additional remarks: See chapter 5 of the report belonging to this type examination certificate.
Conclusion: The lift component meets the requirements referred to in this certificate taking into account any additional remarks mentioned above.

Amsterdam
Date: 18-04-2017
Valid until: 18-03-2022
Ing. J.L. van Vliet
Managing Director
Certification decision by:

Liftinstituut B.V. - Subordinatierapport 01 - P.O. Box 36071 - 1020 CA Amsterdam Netherlands - www.liftinstituut.nl
Registered in the Dutch trade register at 14120



TYPE-EXAMINATION CERTIFICATE FOR LIFTCOMPONENTS

Certificate no.: NL19-400-1002-110-09 Revision no.: 1
Description of the product: 2-panel, telescopic sliding landing door subjected to self-jambing shock test
Trademark, type: Prolift, PRL-C150
Name and address of the manufacturer: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Name and address of the certificate holder: Prolift
Büyükbakkı Mah. Büyükbakkı cad. No:157/A - 157/B
Niğde / Bursa / Turkey
Certificate issued on the following requirements: Lifts Directive 2014/33/EU
Certificate based on the following standard: Parts of: EN 81-20:2014, EN 81-80:2014
Test laboratory: None
Date and number of the laboratory report: None
Date of type examination: 28-03-2018
Additional document with this certificate: Annex I Report belonging to the type-examination certificate no. NL19-400-1002-110-09
Additional remarks: See report.
Conclusion: The lift component meets the requirements referred to in this certificate taking into account any additional remarks mentioned above.

Amsterdam
Date: 23-03-2018
Valid until: 23-03-2022
Ing. A.2. van Ommen
Manager Business Unit
Certification

Liftinstituut B.V. - Subordinatierapport 01 - P.O. Box 36071 - 1020 CA Amsterdam Netherlands - www.liftinstituut.nl
Registered in the Dutch trade register at 14120



Strojarski zavod d.o.o.
(Engineering Test Institute, Public Enterprise)
Notified Body 015

CERTIFICATE EU TYPE EXAMINATION

Module B
Number: 141-25127/18022

Issued in accordance with part A, Annex IV of the European Parliament and Council Directive (2014/53/EU)

Client:

PROLIFT ASANSÖR SAN. VE TIC. A.Ş.
Büyükbakkı Mah. Boydokteci Cad. No: 157 / A - B Niğde / Bursa, Turkey

Product:

Ascending car overspeed protection and unmonitored car movement protection device

Type:

PRL MP 360

Product specification:
See Annex No. 141-25127/18022/1

The above mentioned Notified Body by this Certificate certifies the conformity of the subject sample of safety component properties with the requirements of the

**European Parliament and Council Directive 2014/53/EU
according to Annex IV (module B)**

The basis for this Certificate issue is the conformity assessment carried out according to Module B, evaluated in the Part 1 of the inspection finding, inspection Report No. 185180022 dated October 26, 2018. An integral part of this Certificate is the Annex No. 141-25127/18022/1 dated October 26, 2018.

Rules for handling the certificate are stated in the conclusions of inspection reports.

Validity of the Certificate EU type examination is limited on period of 5 years.

In Brno, on October 26, 2018




Ing. Jiří Ondřej
Deputy Director



This Certificate consists of 7 Pages + 2 Pages of the Annex

Approved for use in the EU. Notified Body No. 015, Brno, Czech Republic
Issued on 26.10.2018, valid until 26.10.2023, unless otherwise stated.
www.strojarski.cz

ProManner, ProService, ProLift

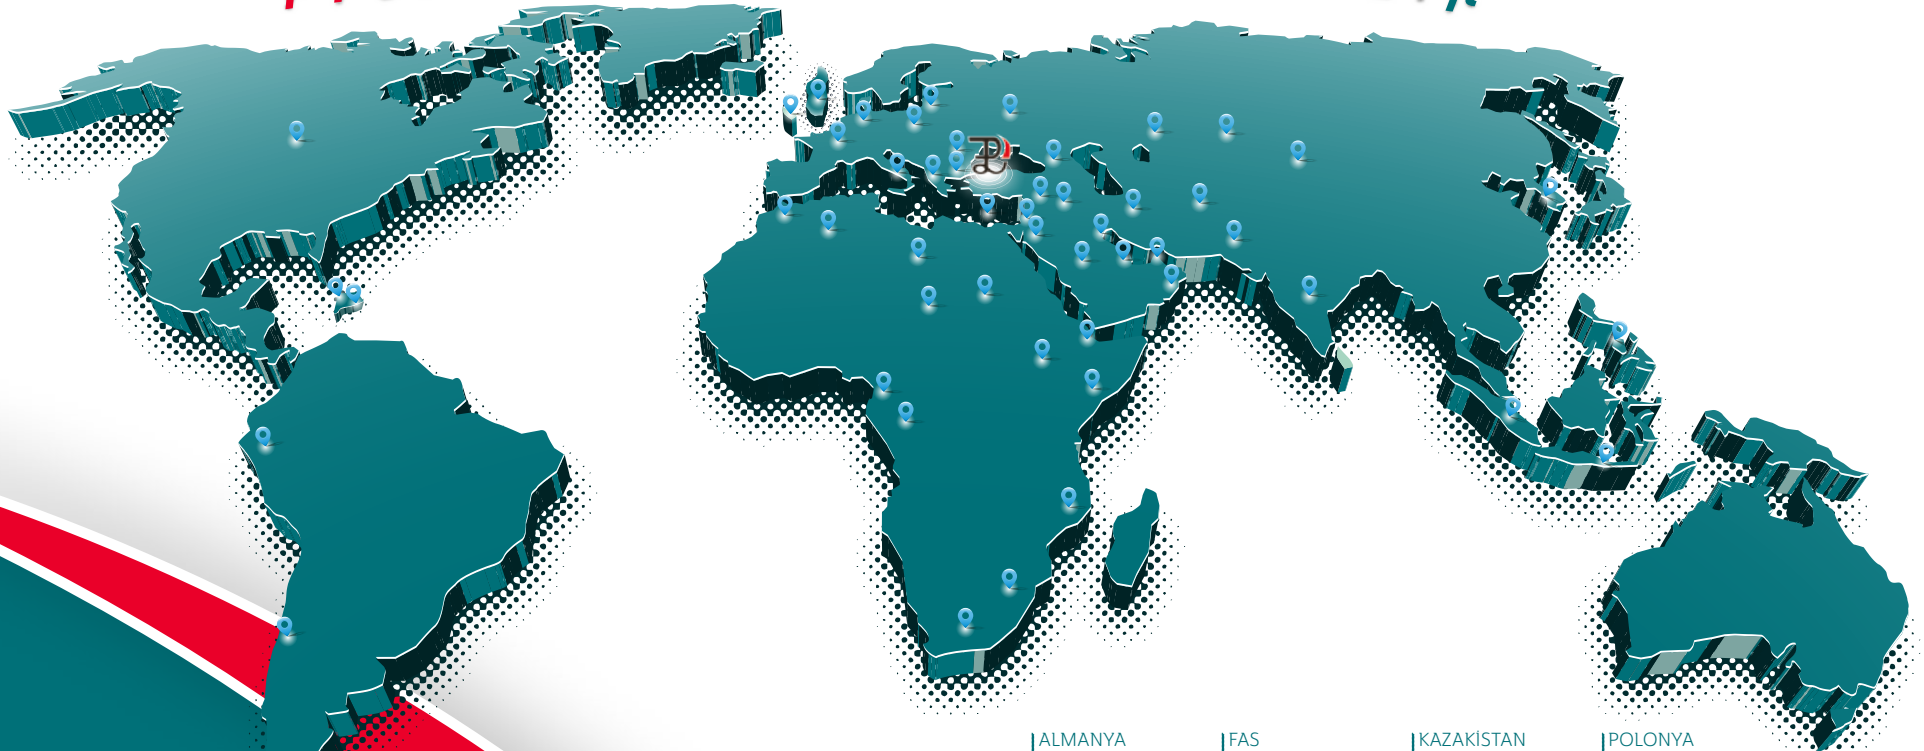

PROLIFT
ELEVATOR

PROLİFT ASANSÖR SAN. ve TİC. A.Ş.
Büyükbalkılı Mah. Büyükbalkılı Cad.
No:157/A-157/B Nilüfer/Bursa

T: +90 444 21 70
F: +90 224 443 28 49
E-mail : info@proliftasansor.com.tr
Web : www.proliftasansor.com.tr

ALMANYA
ARJANTİN
ARNAVUTLUK
AZERBAIJAN
B.ARAP EMİRLİKLERİ
BELARUS
BULGARİSTAN
BOSNA HERSEK
CEZAYİR
ÇEK CUMHURİYETİ
ERMENİSTAN

FAS
FRANSA
GİNE
GÜRCİSTAN
HİRVATİSTAN
HİNDİSTAN
HOLLANDA
İRAN
İTALYA
İSPANYA
KATAR

KAZAKİSTAN
KIRGIZİSTAN
KOSOVA
LETONYA
LÜBNAN
MAKEDONYA
MALİ
MALTA
MEKSİKA
MISIR
NİJERYA

POLONYA
ROMANYA
RUSYA
SİRBİSTAN
SLOVENYA
TÜRKMENİSTAN
TUNUS
UKRAYNA
YUNANİSTAN
SUUDİ
ARABİSTAN

GERMANY
ARGENTİNA
ALBANIA
AZERBAIJAN
UAE
BELARUS
BULGARIA
BOSNIA-HERZEGOVINA
ALGERIA
CZECH REPUBLIC
ARMENIA

MOROCCO
FRANCE
GUINEA
GEORGIA
CROATIA
INDIA
NETHERLANDS
IRANIAN
ITALY
SPAIN
QATAR

KAZAKHISTAN
KYRGYZSTAN
KOSOVO
LATVIA
LEBANON
MACEDONIA
MALI
MALTA
MEXICAN
EGYPT
NIGERIA

POLAND
ROMANIA
RUSSIA
SERBIA
SLOVENIA
TURKMENISTAN
TUNISIA
UKRAINE
GREECE
SAUDI ARABIA

